MIMO OTA in a Small Anechoic Chamber

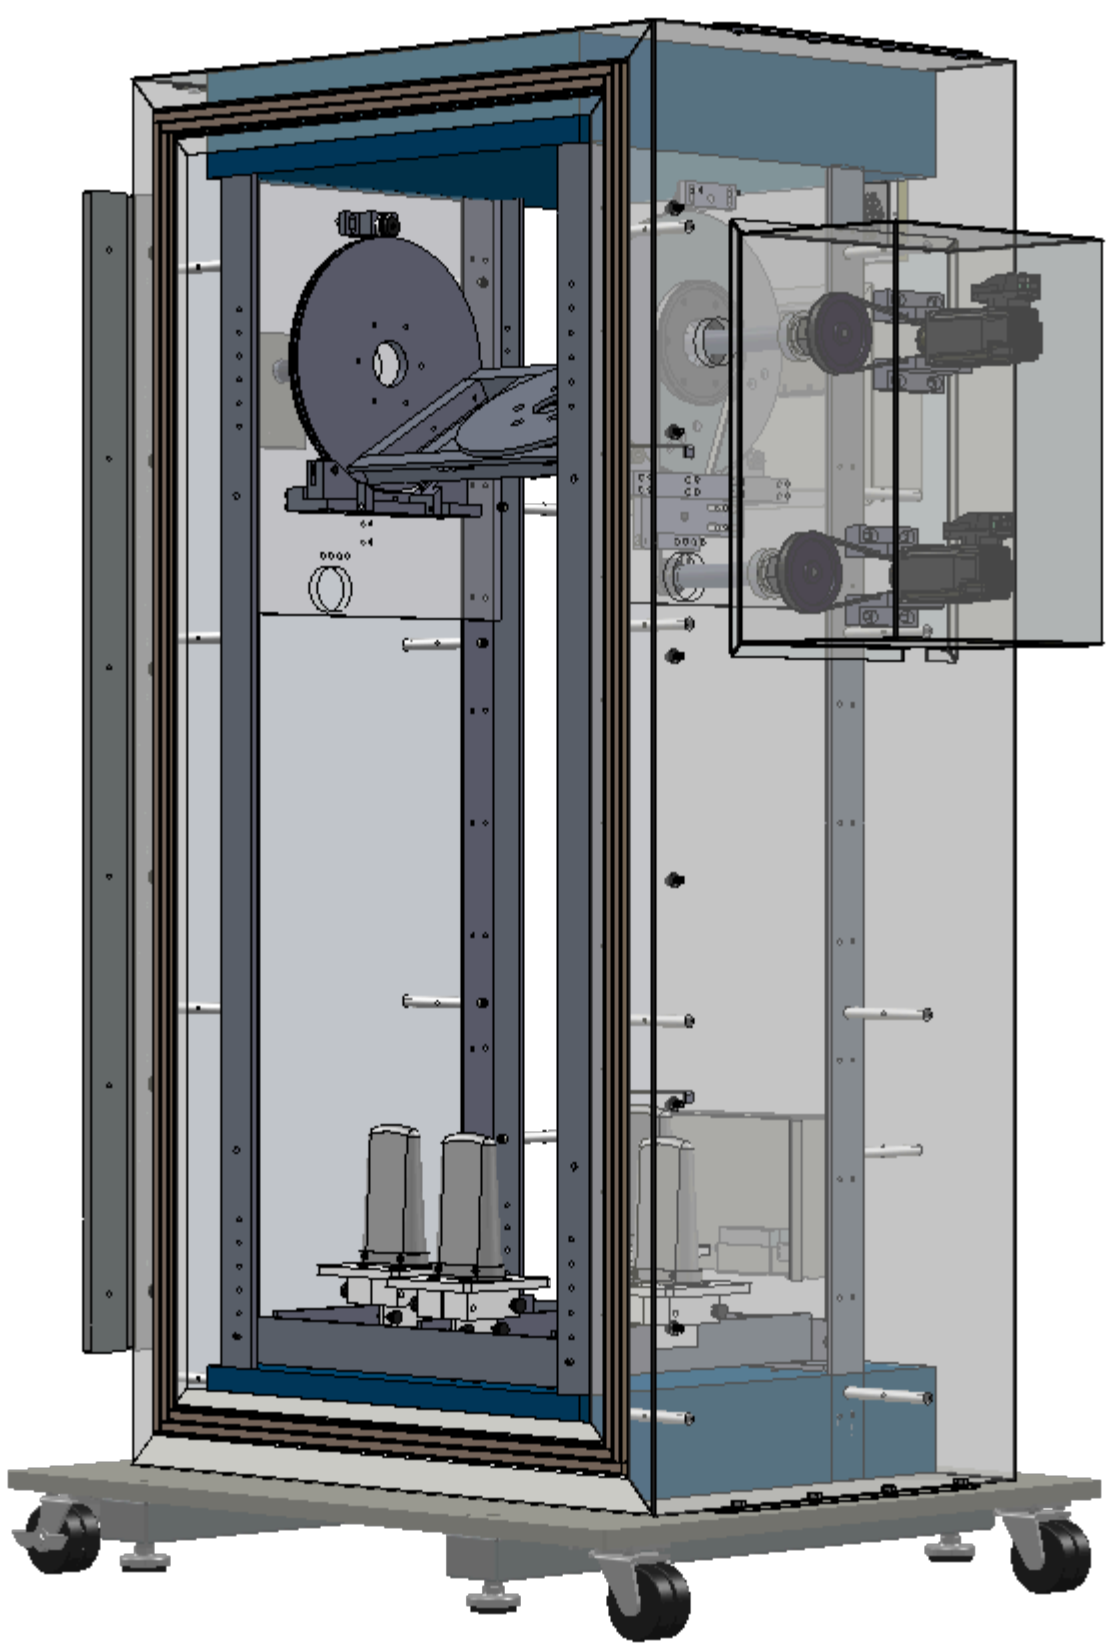

NSF EARS Meeting
October 8-9, 2013

NSF ID: 1217558

Dr. Nicholas Kirsch, University of New Hampshire
Nicholas.Kirsch@unh.edu
Fanny Mlinarsky, octoScope
fm@octoscope.com

Motivation

- NSF Enhancing Access to the Radio Spectrum (EARS)
  - Wireless system tests, measurements, and validation

- Next generation wireless standards use multiple antenna systems to increase connectivity and spectral efficiency.

- Certification of next generation devices is an expensive and time consuming process.

MIMO OTA Test Methods

- MIMO OTA test metrics are being standardized by 3GPP [1] and CTIA [5]
- Large anechoic chamber
  - DUT is surround by multiple antennas inside the chamber
  - Multi-cluster 2D measurements on a plane
- Small anechoic chamber
  - Single cluster 3-D measurements indicating DUT's MIMO performance vs. orientation
  - 2-Stage method whereby antennas are measured in the chamber and then modeled using a traditional conducted fader
- Reverberation chamber
  - Uniform isotropic (3D) propagation is achieved via reflections from metal walls and mechanical stirrers
  - An external channel emulator is used to provide power delay profiles, Doppler and multipath fading

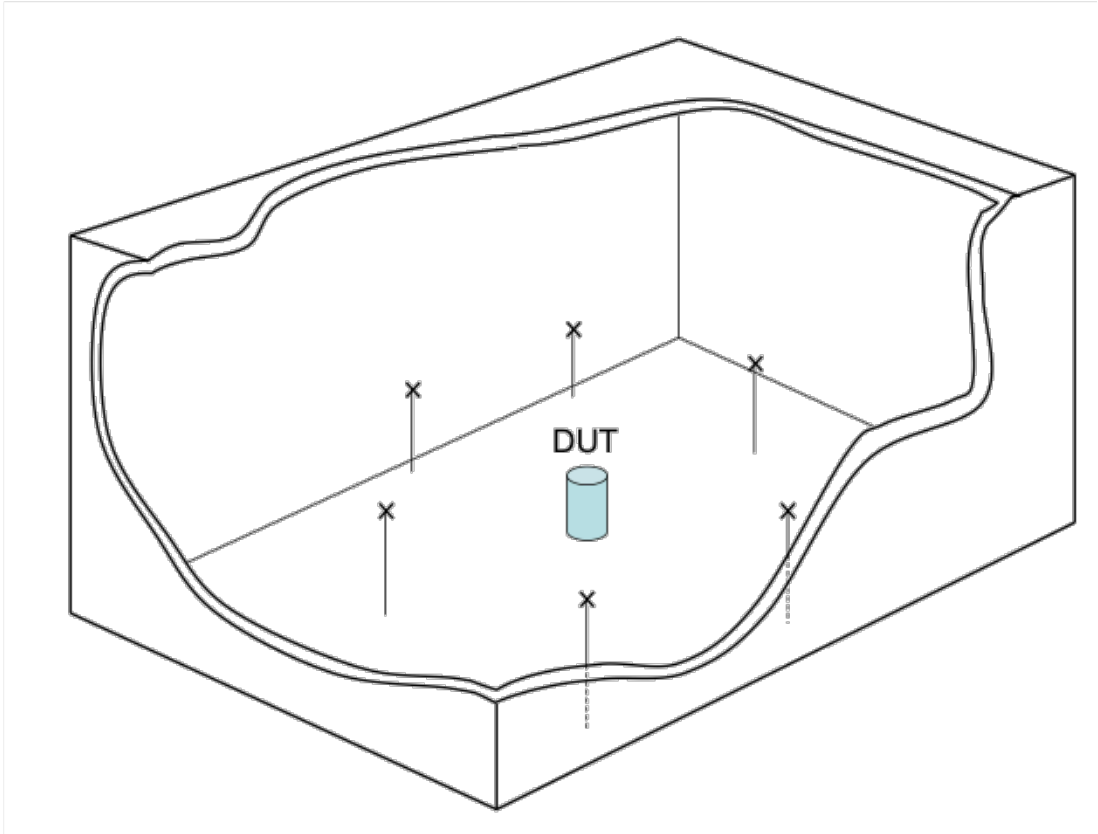

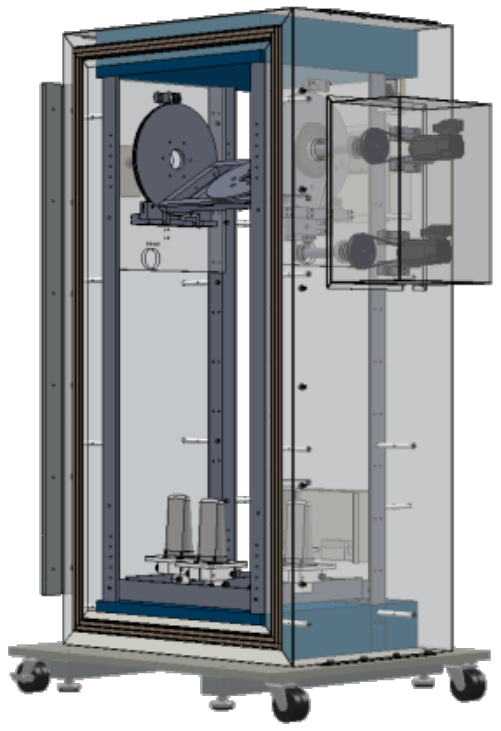

Comparison of MIMO-OTA Methods

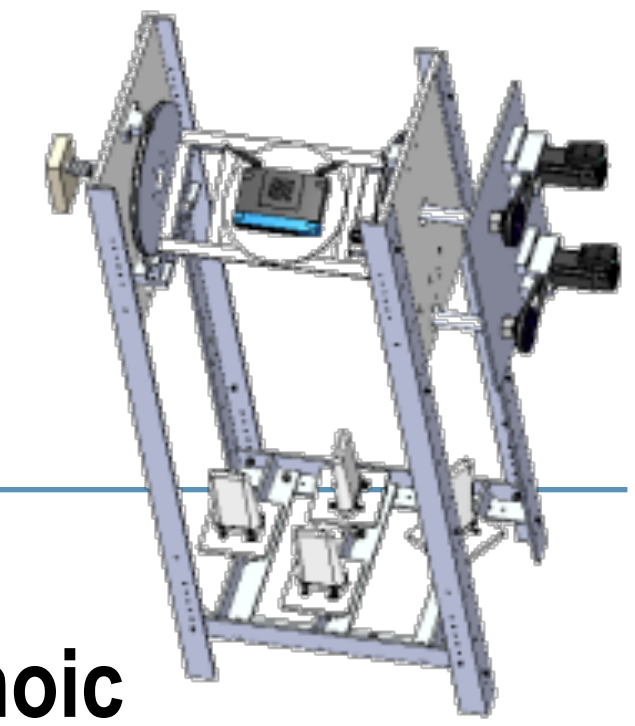

Full sized anechoic	Reverberation chamber	Single cluster anechoic
• Provides 2D performance information with 360° multi-cluster propagation • Requires a lot of space	• Less expensive and smaller than full sized anechoic chamber • No information on where the nulls are in the antenna field	• Provides 3D performance information  • Supports single cluster anechoic and 2-stage methods • Takes little space

Conventional Chamber MIMO-OTA Testbed

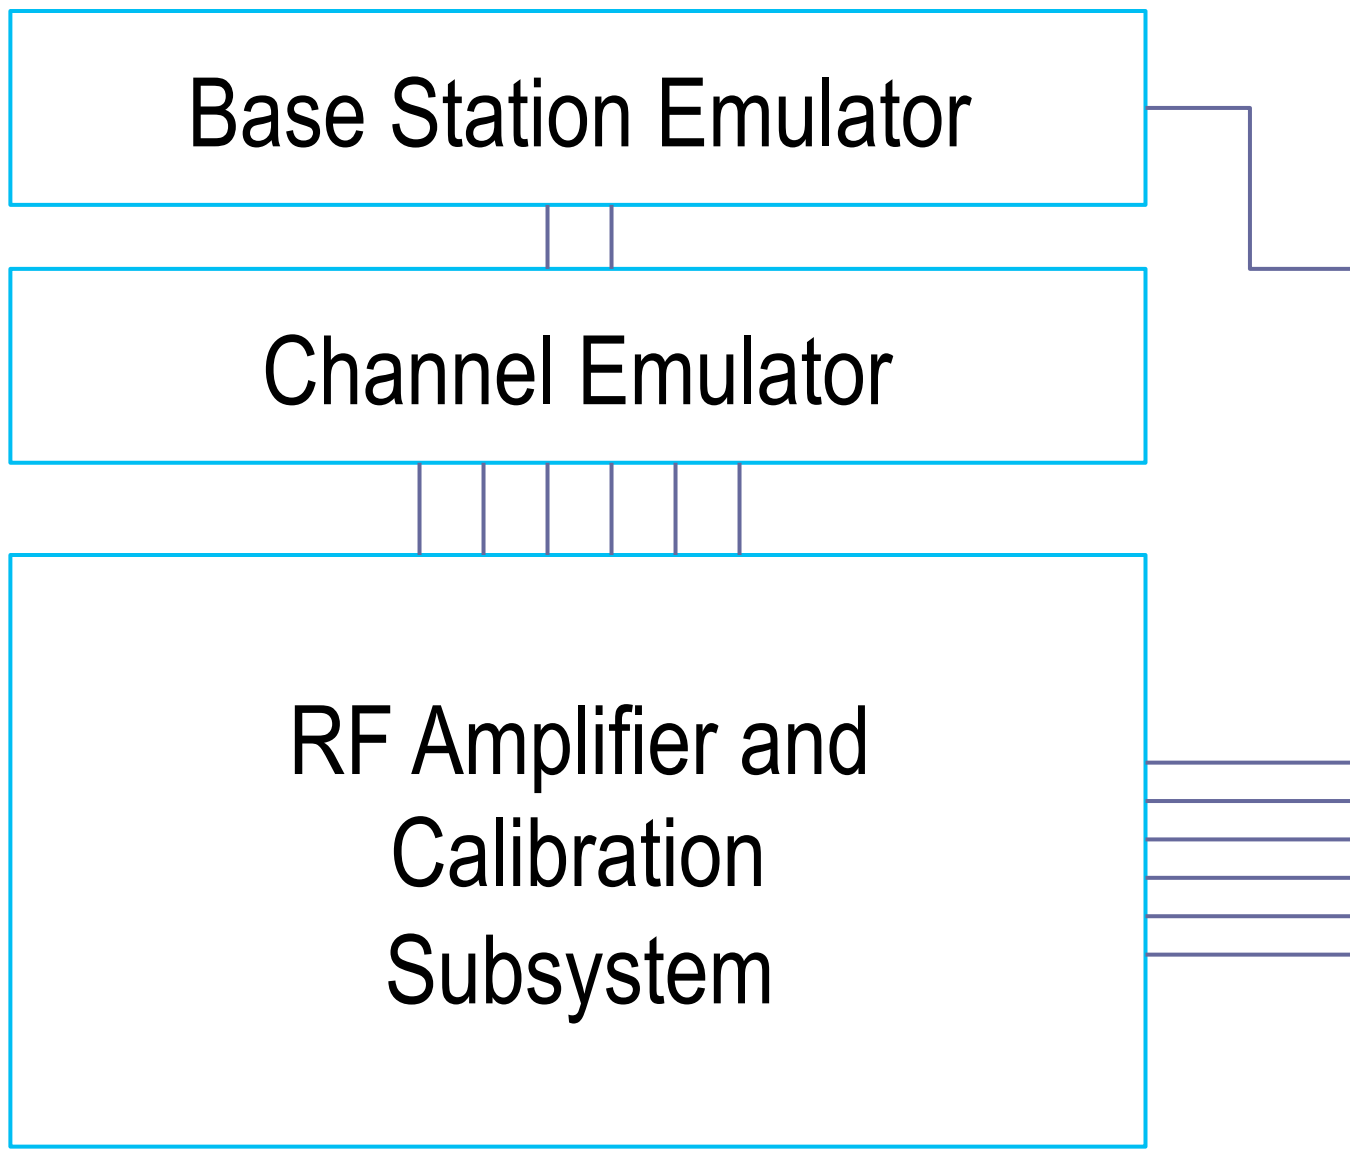

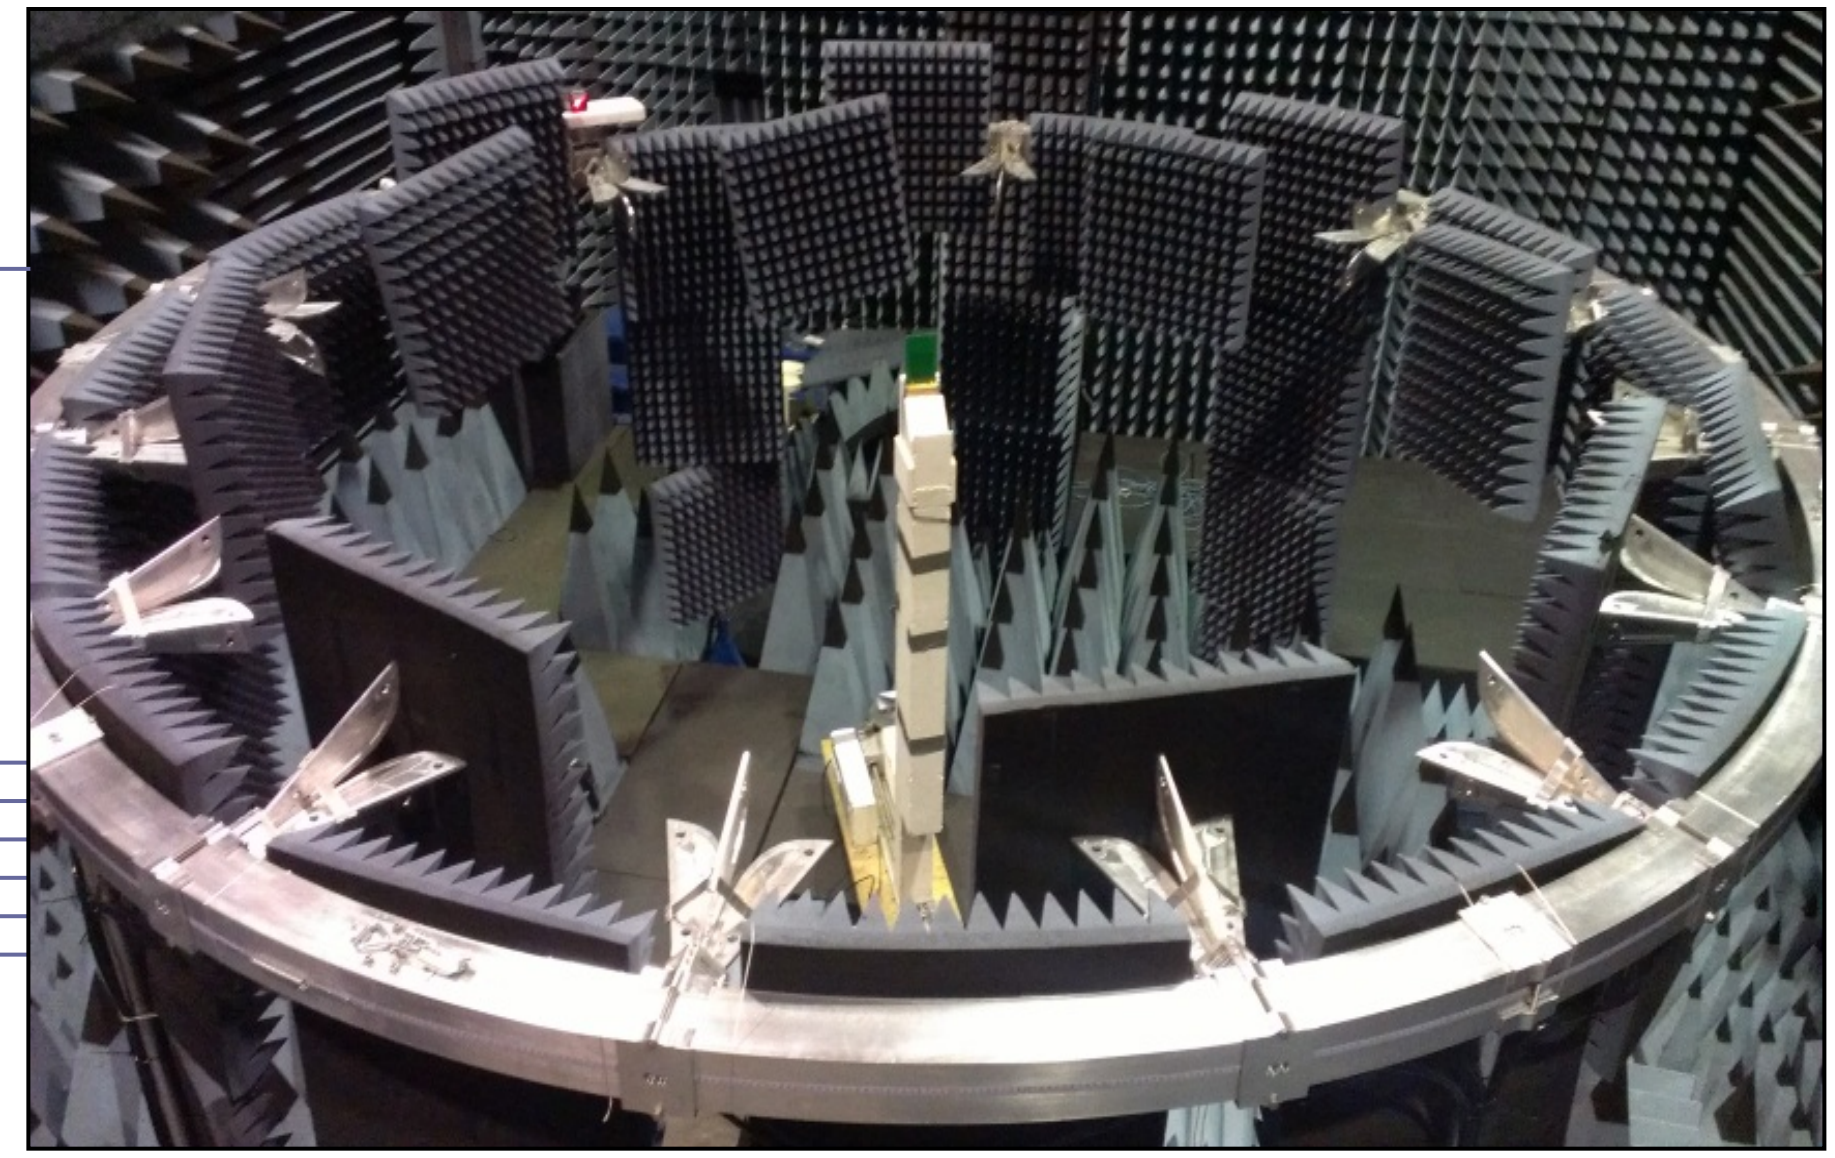

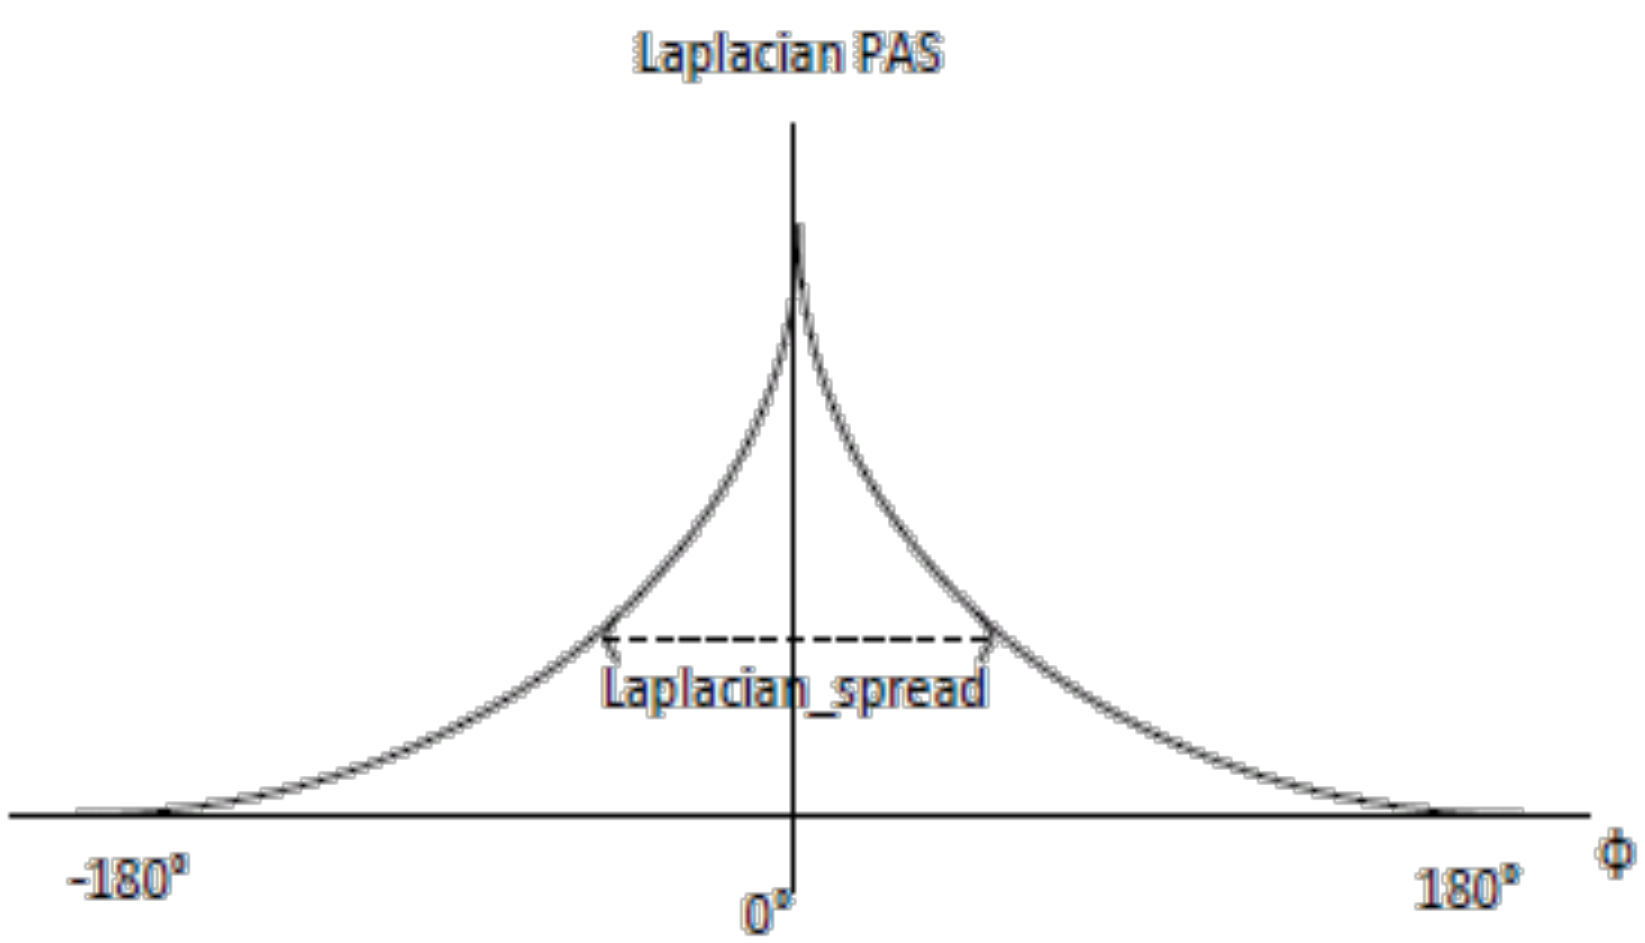

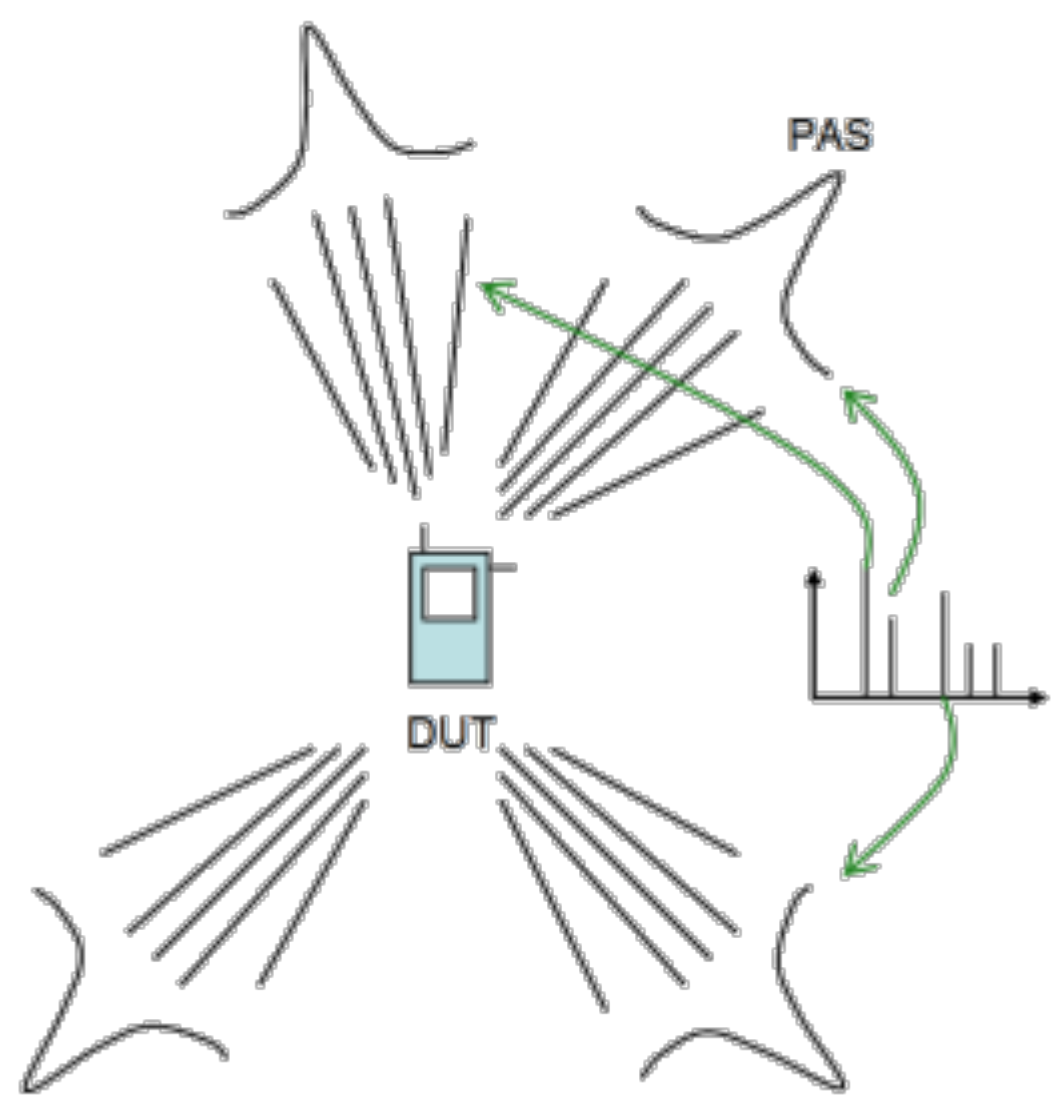

Small Chamber MIMO-OTA Testbed

Single cluster UMa/UMi models

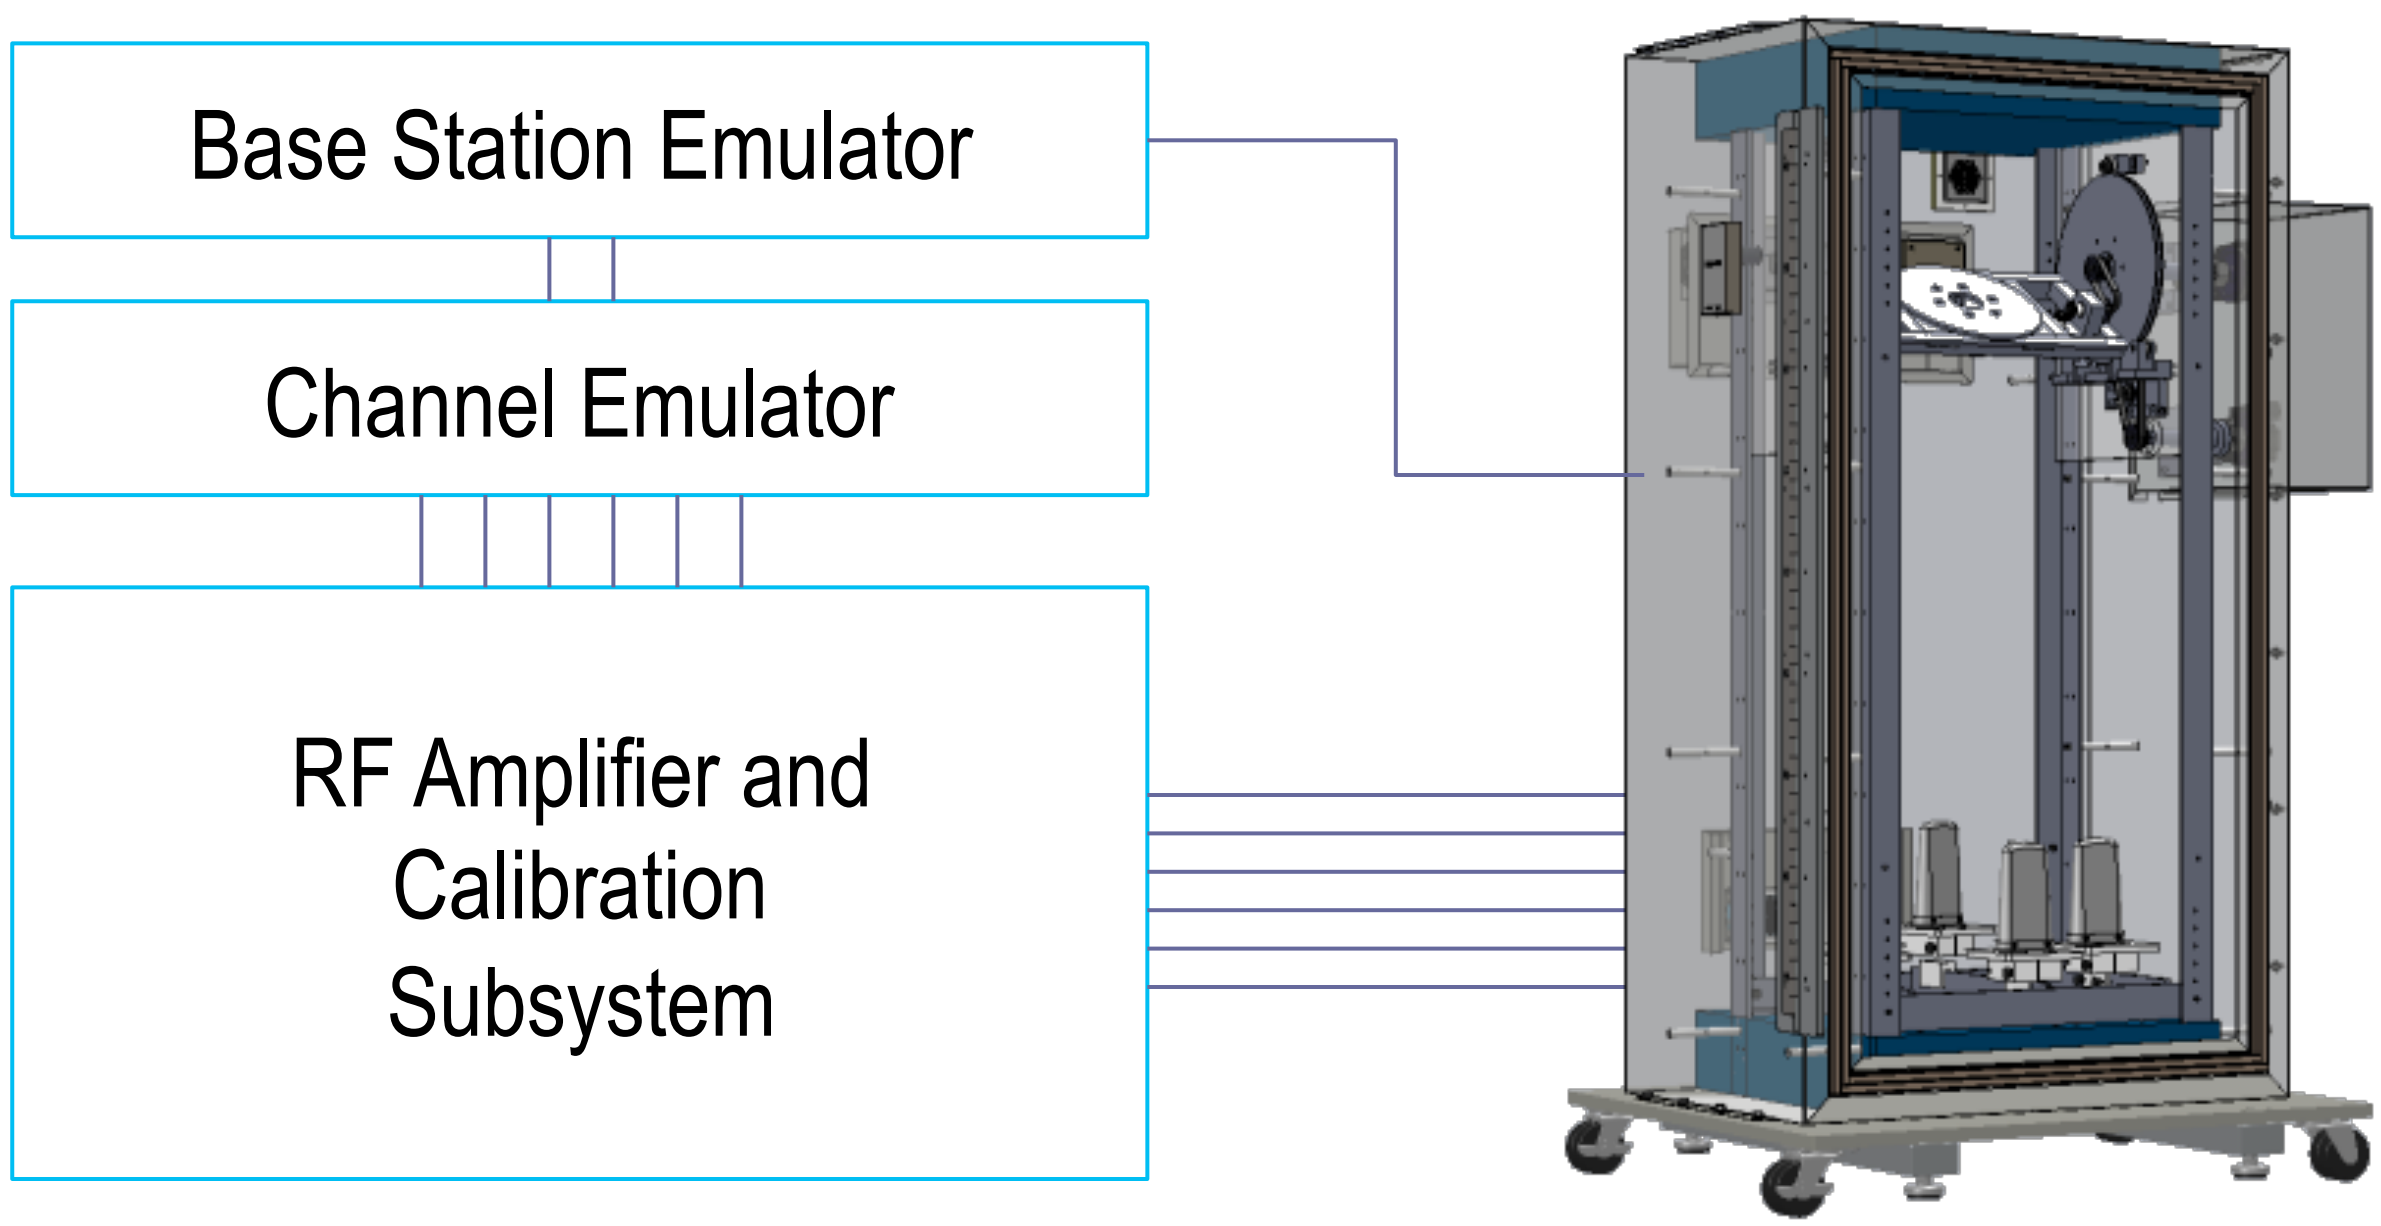

NSF Phase I: Accomplishments

- Goal is to analyze accuracy of the measurement as a function of angular spread of test antennas and number of antennas
- Developed synthesis algorithm to produce Laplacian PAS clusters in the test zone based on:
  - The wavelength used in the measurement
  - Test zone radius
  - Geometry of chamber and probe locations
  - Shape of probe field
- Algorithm calculates error of synthesized field vs. theory – Reflectivity [8]

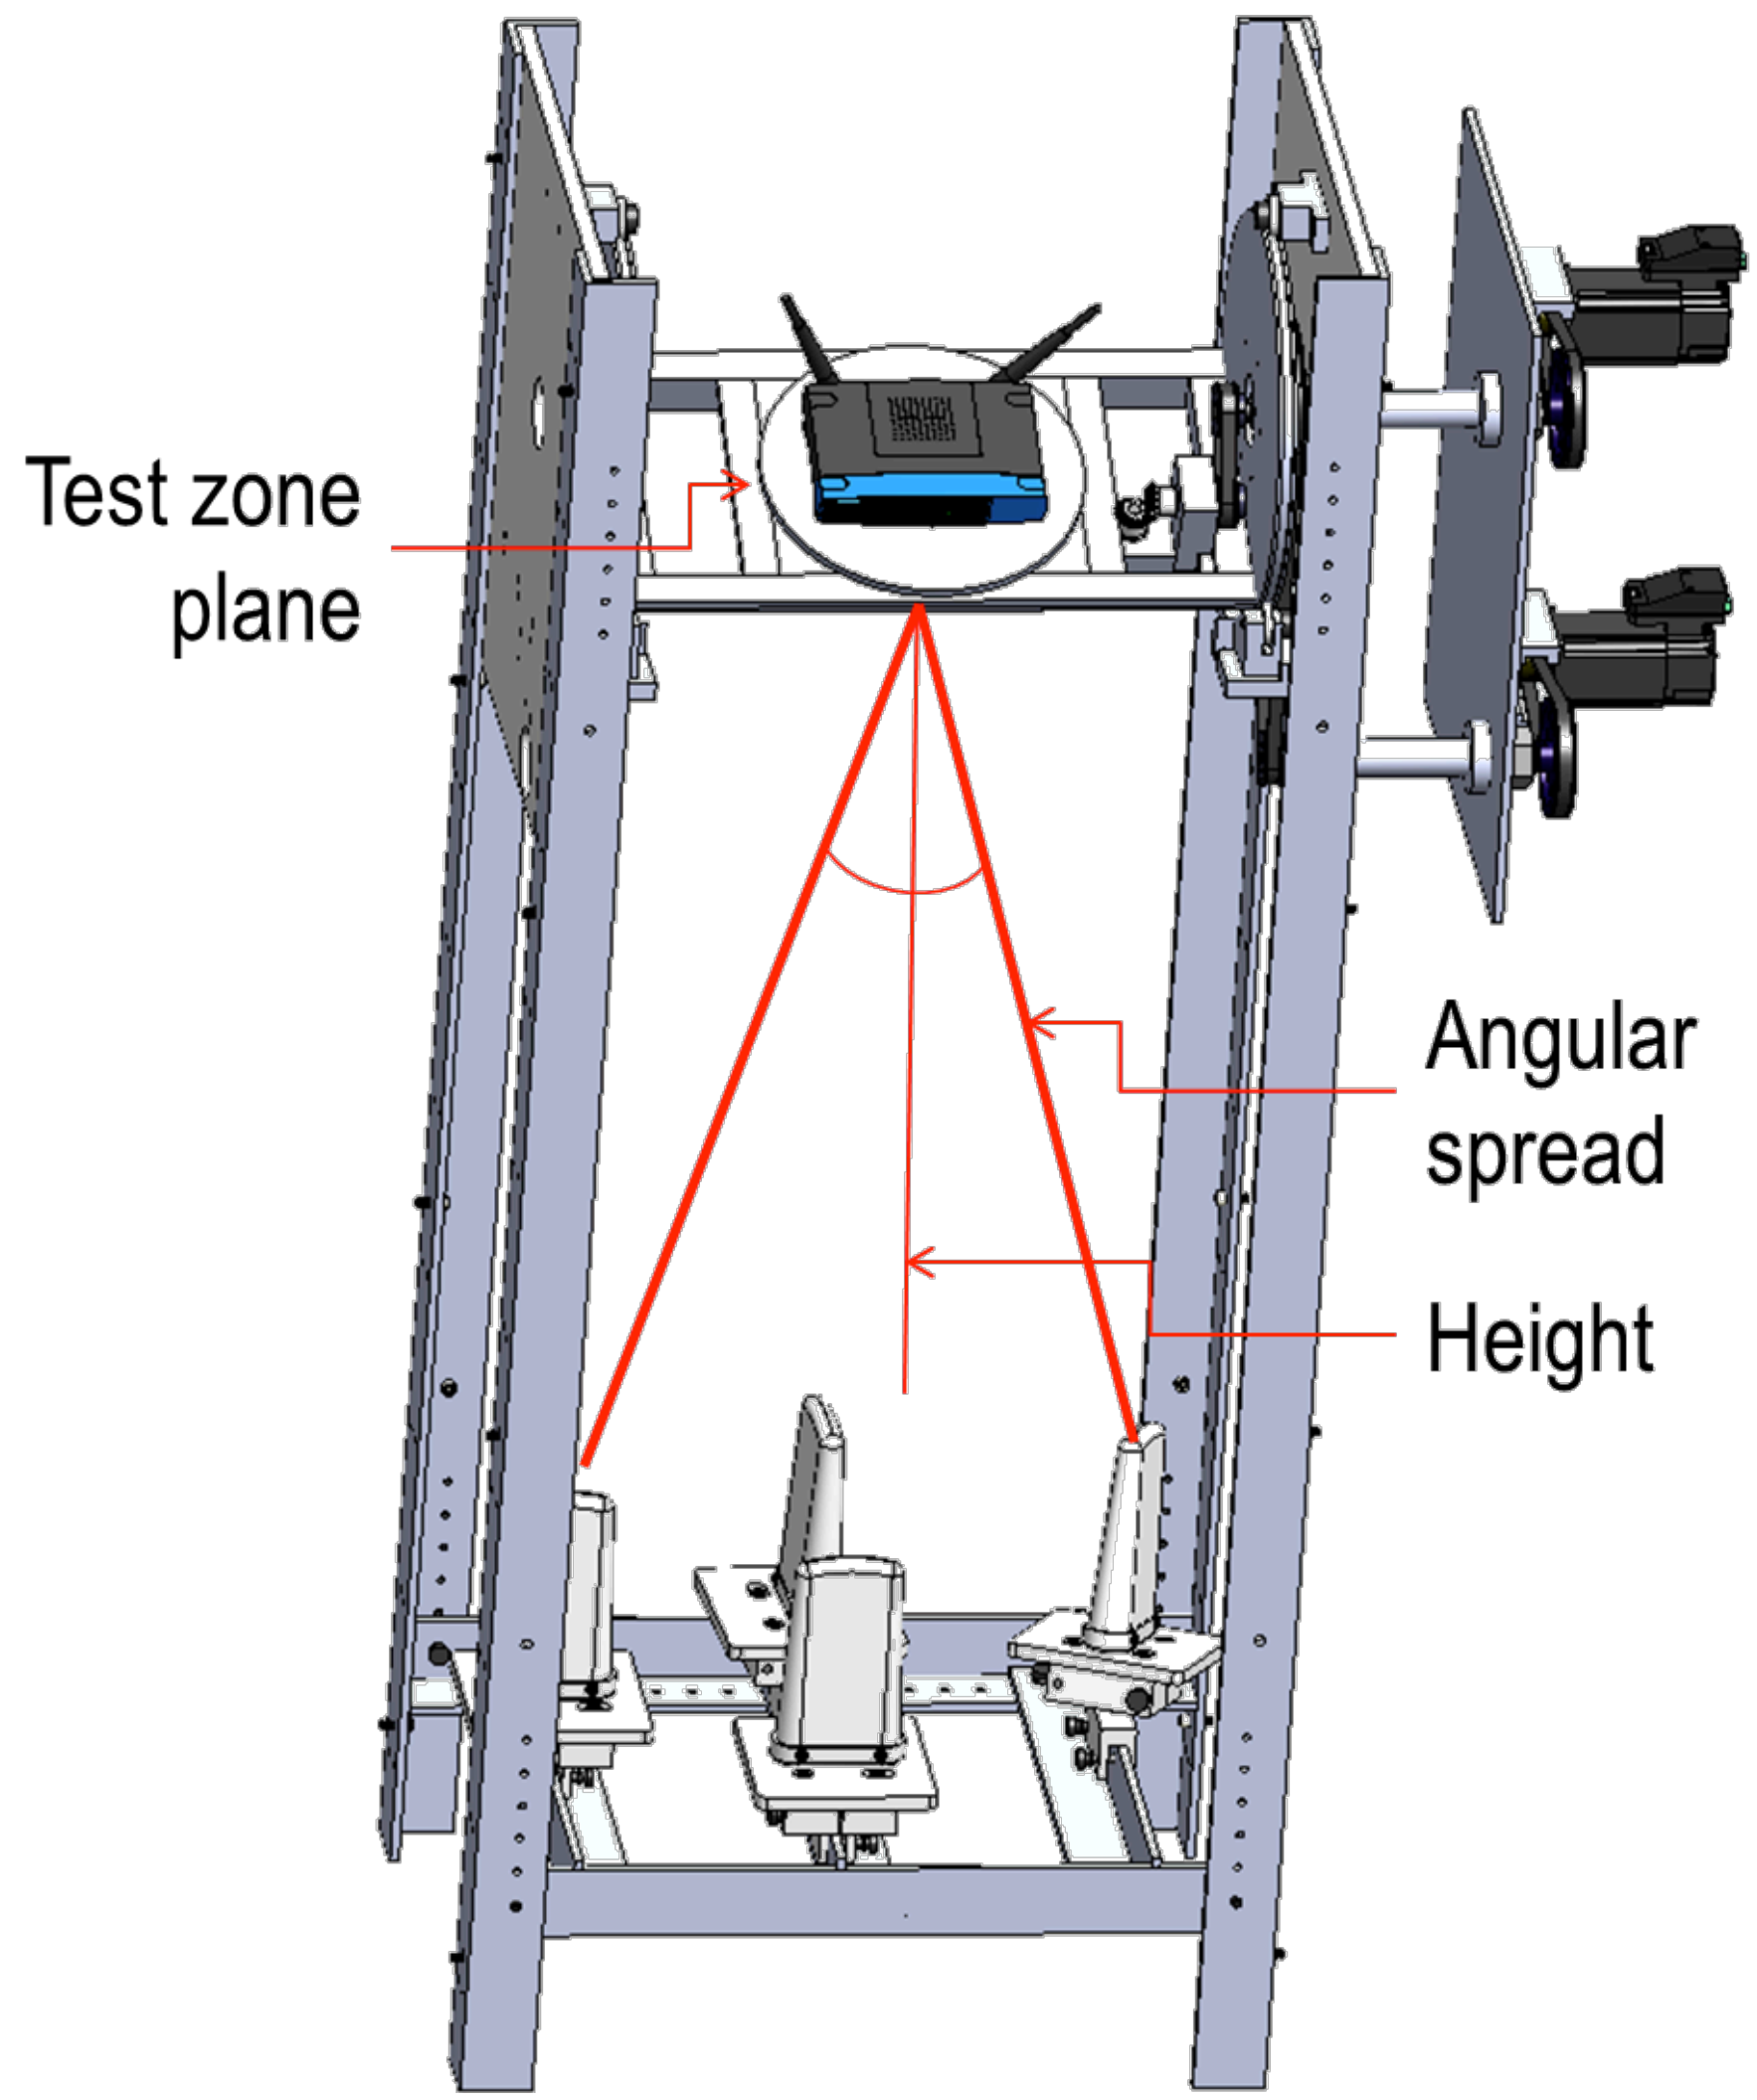

PAS = power angular spread

Method – Plane Wave Synthesis

- Widely used *spherical wave theory* models 3D antenna radiation [8]
- *Plane wave synthesis* technique is based on spherical wave theory [8] and enables synthesis of Laplacian PAS cluster field
- Team created synthesis algorithm to generate Laplacian PAS

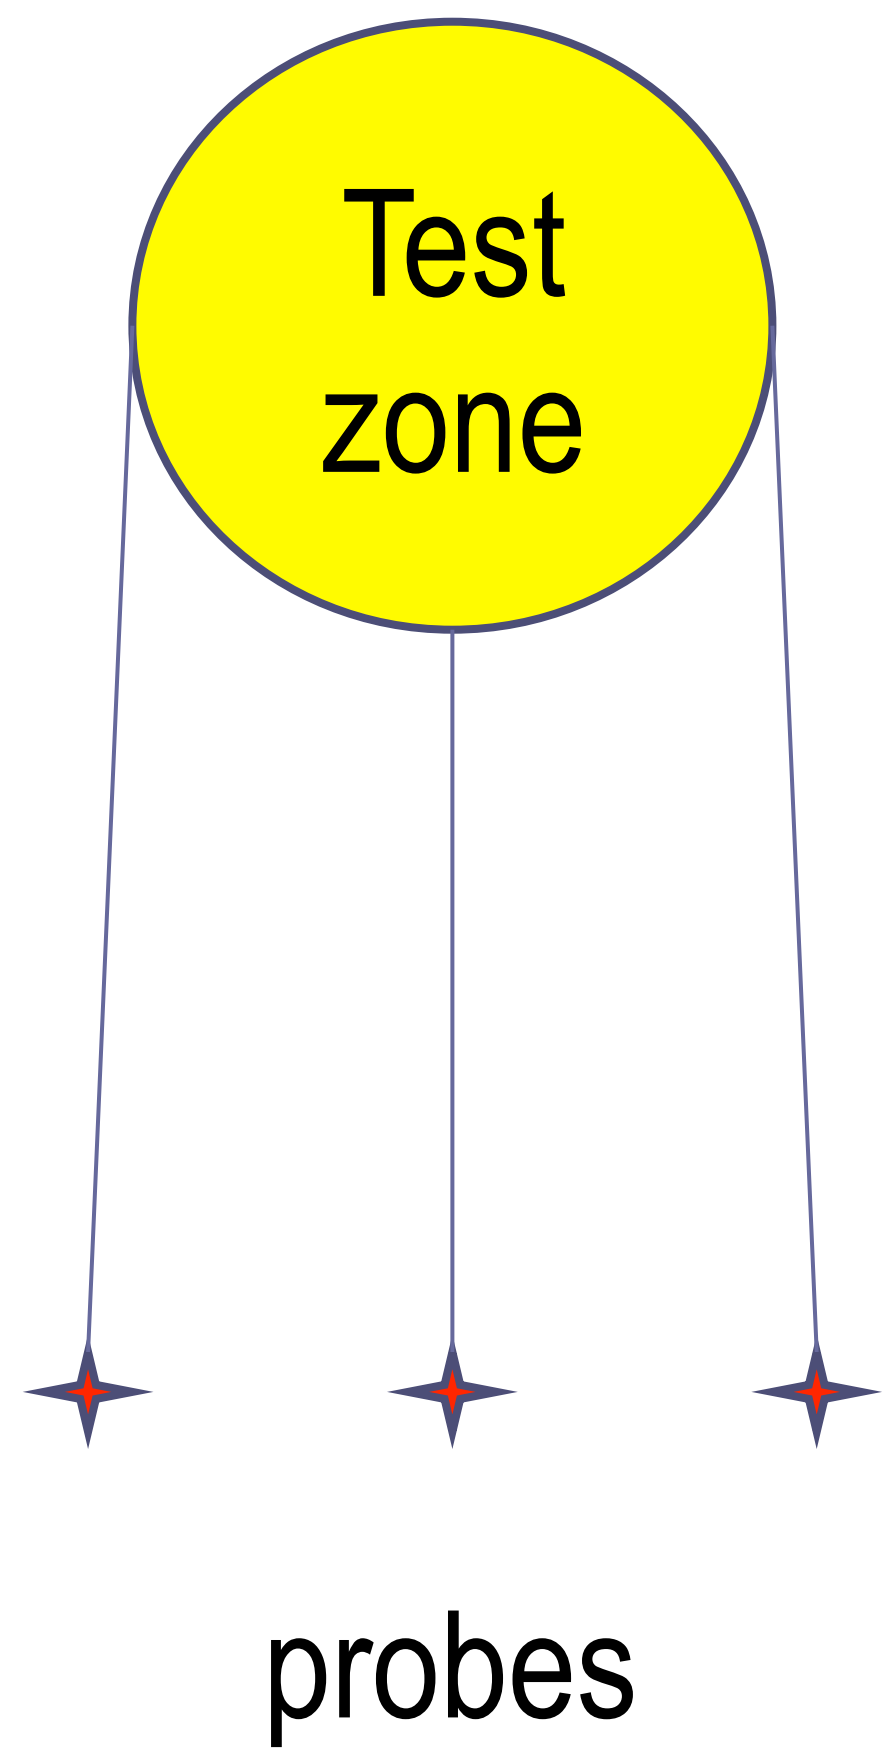

E-field Over Test Zone

Synthesized by Model

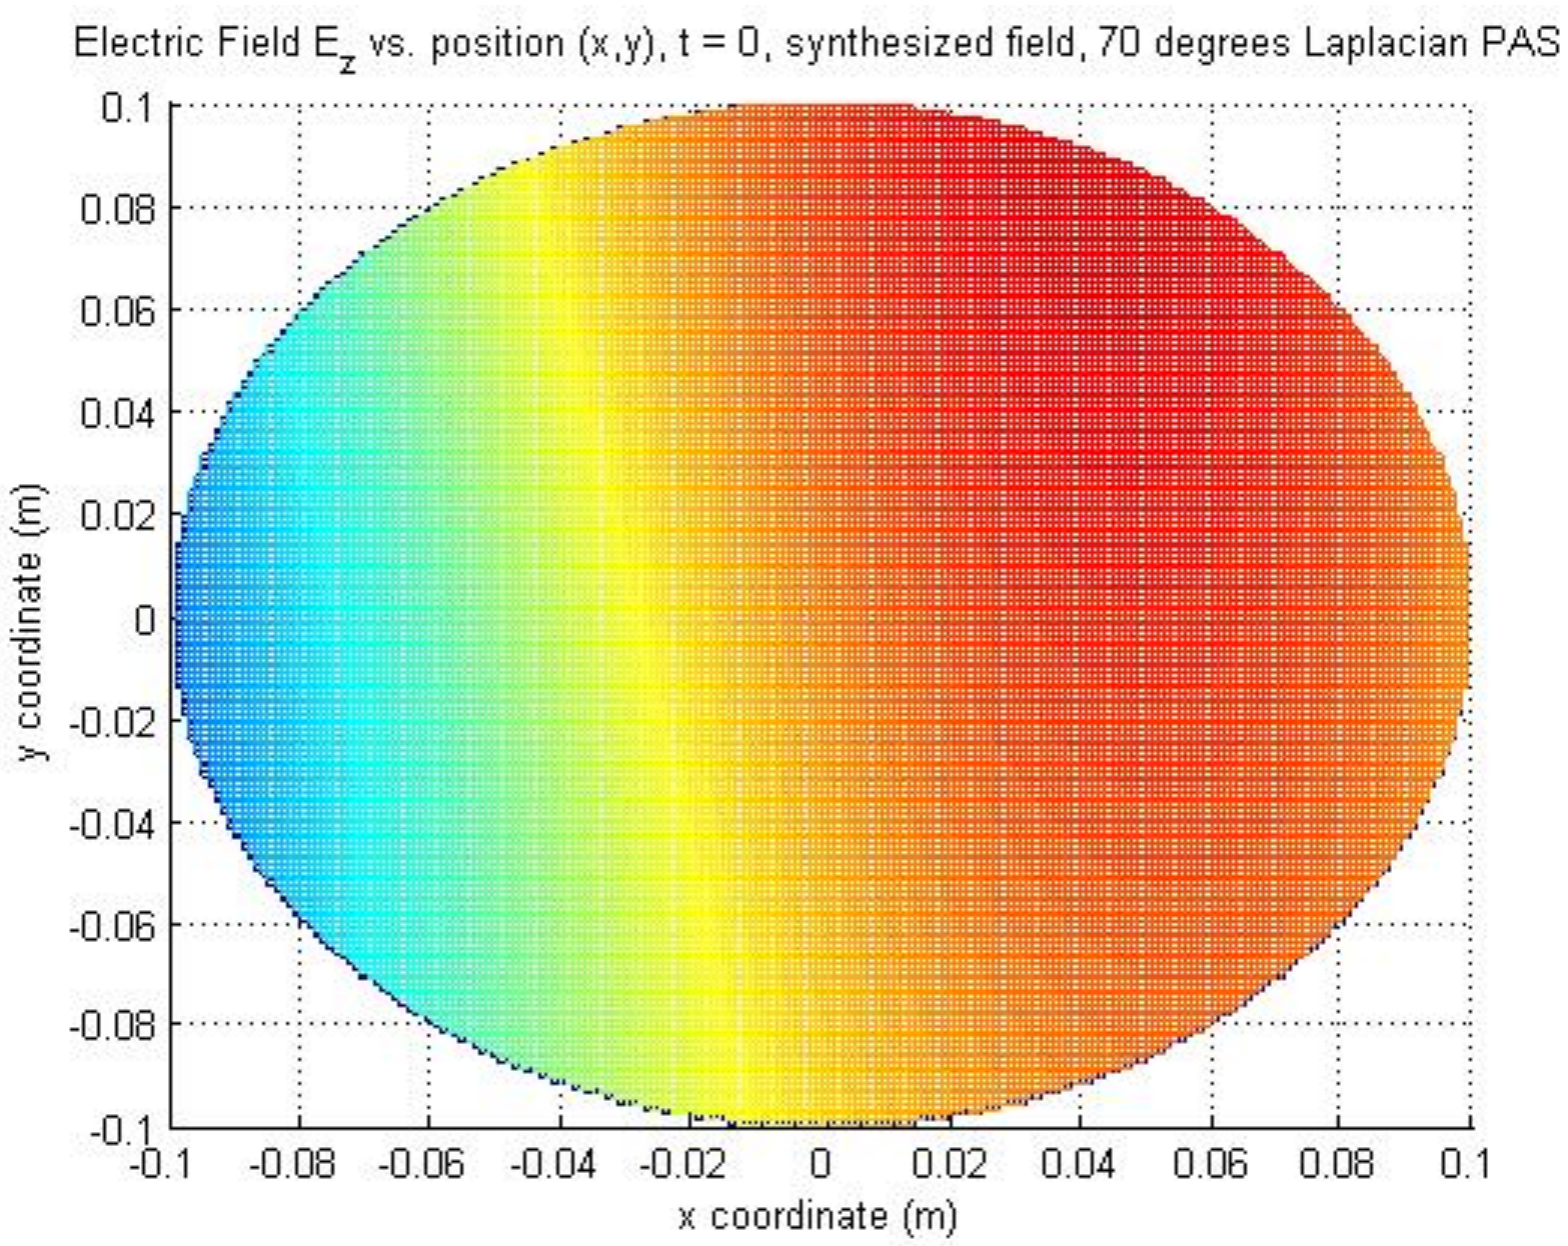

Theoretical

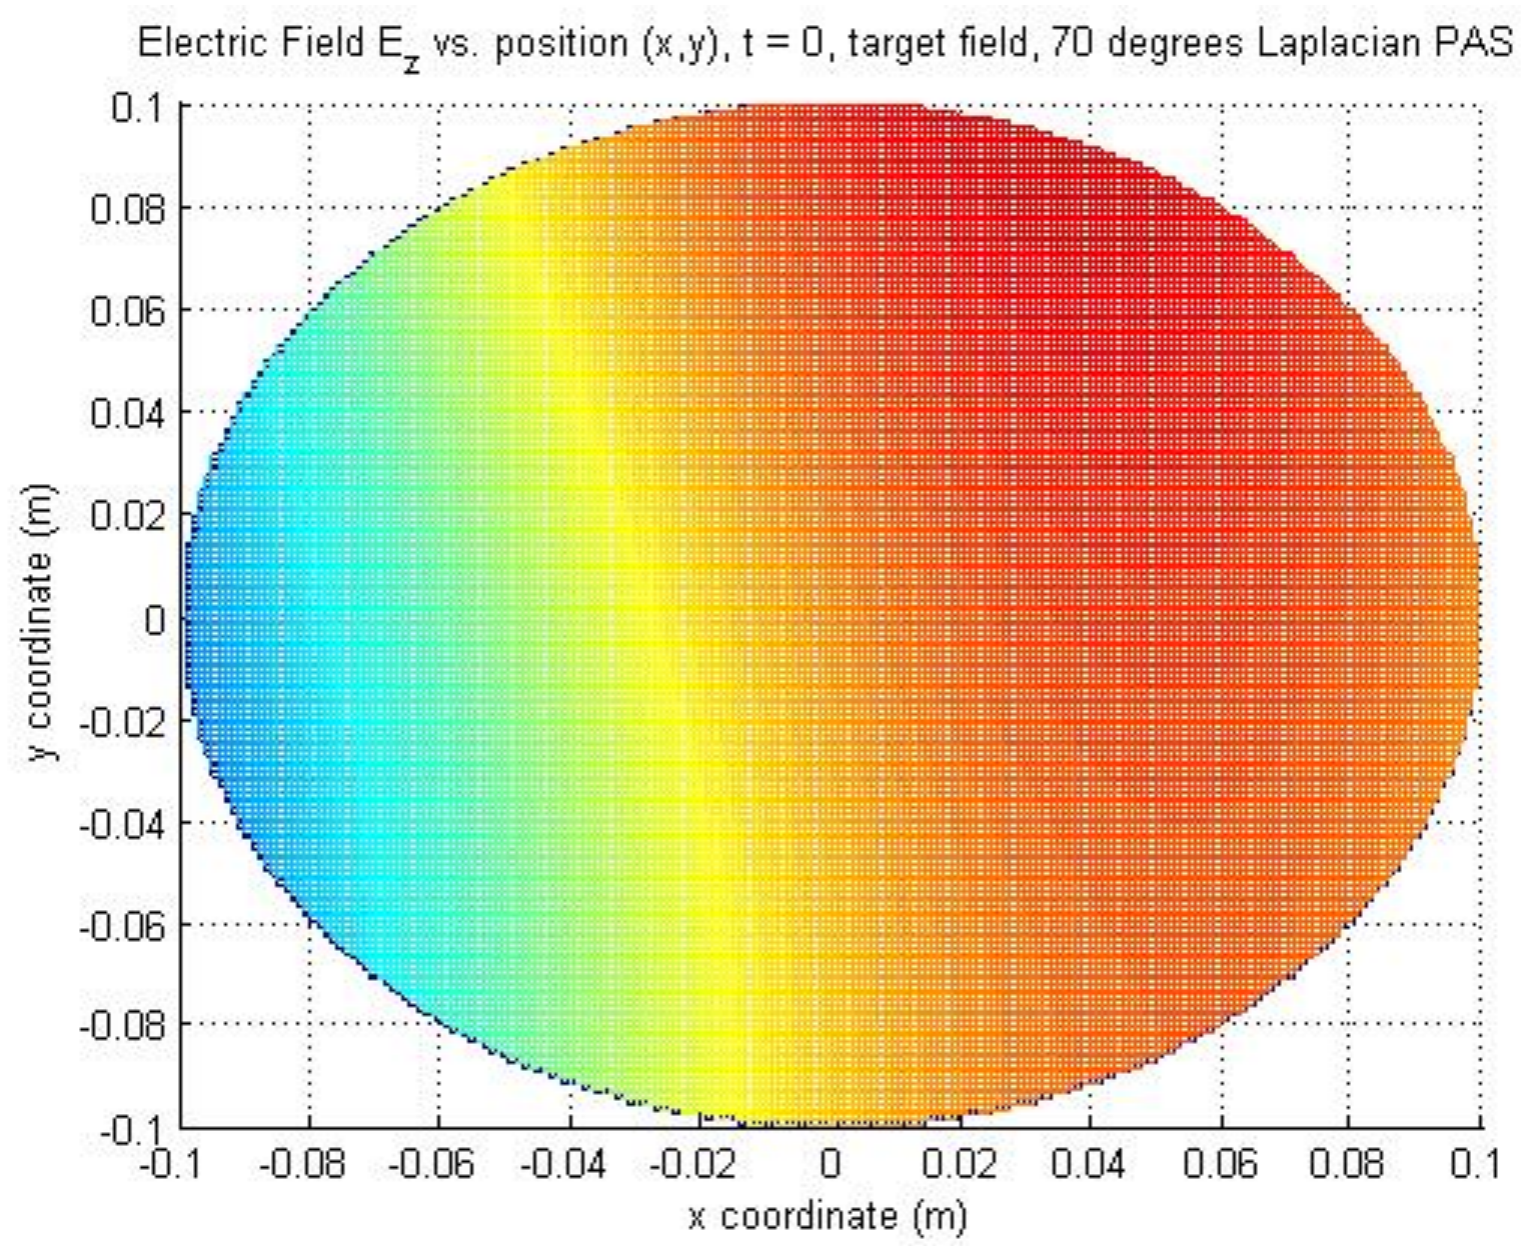

Synthesized electric field levels across the test zone agree with the theoretical field levels for the desired Laplacian PAS.

Note: Results are shown for a single instance in time

E-field at Max Test Zone Boundary

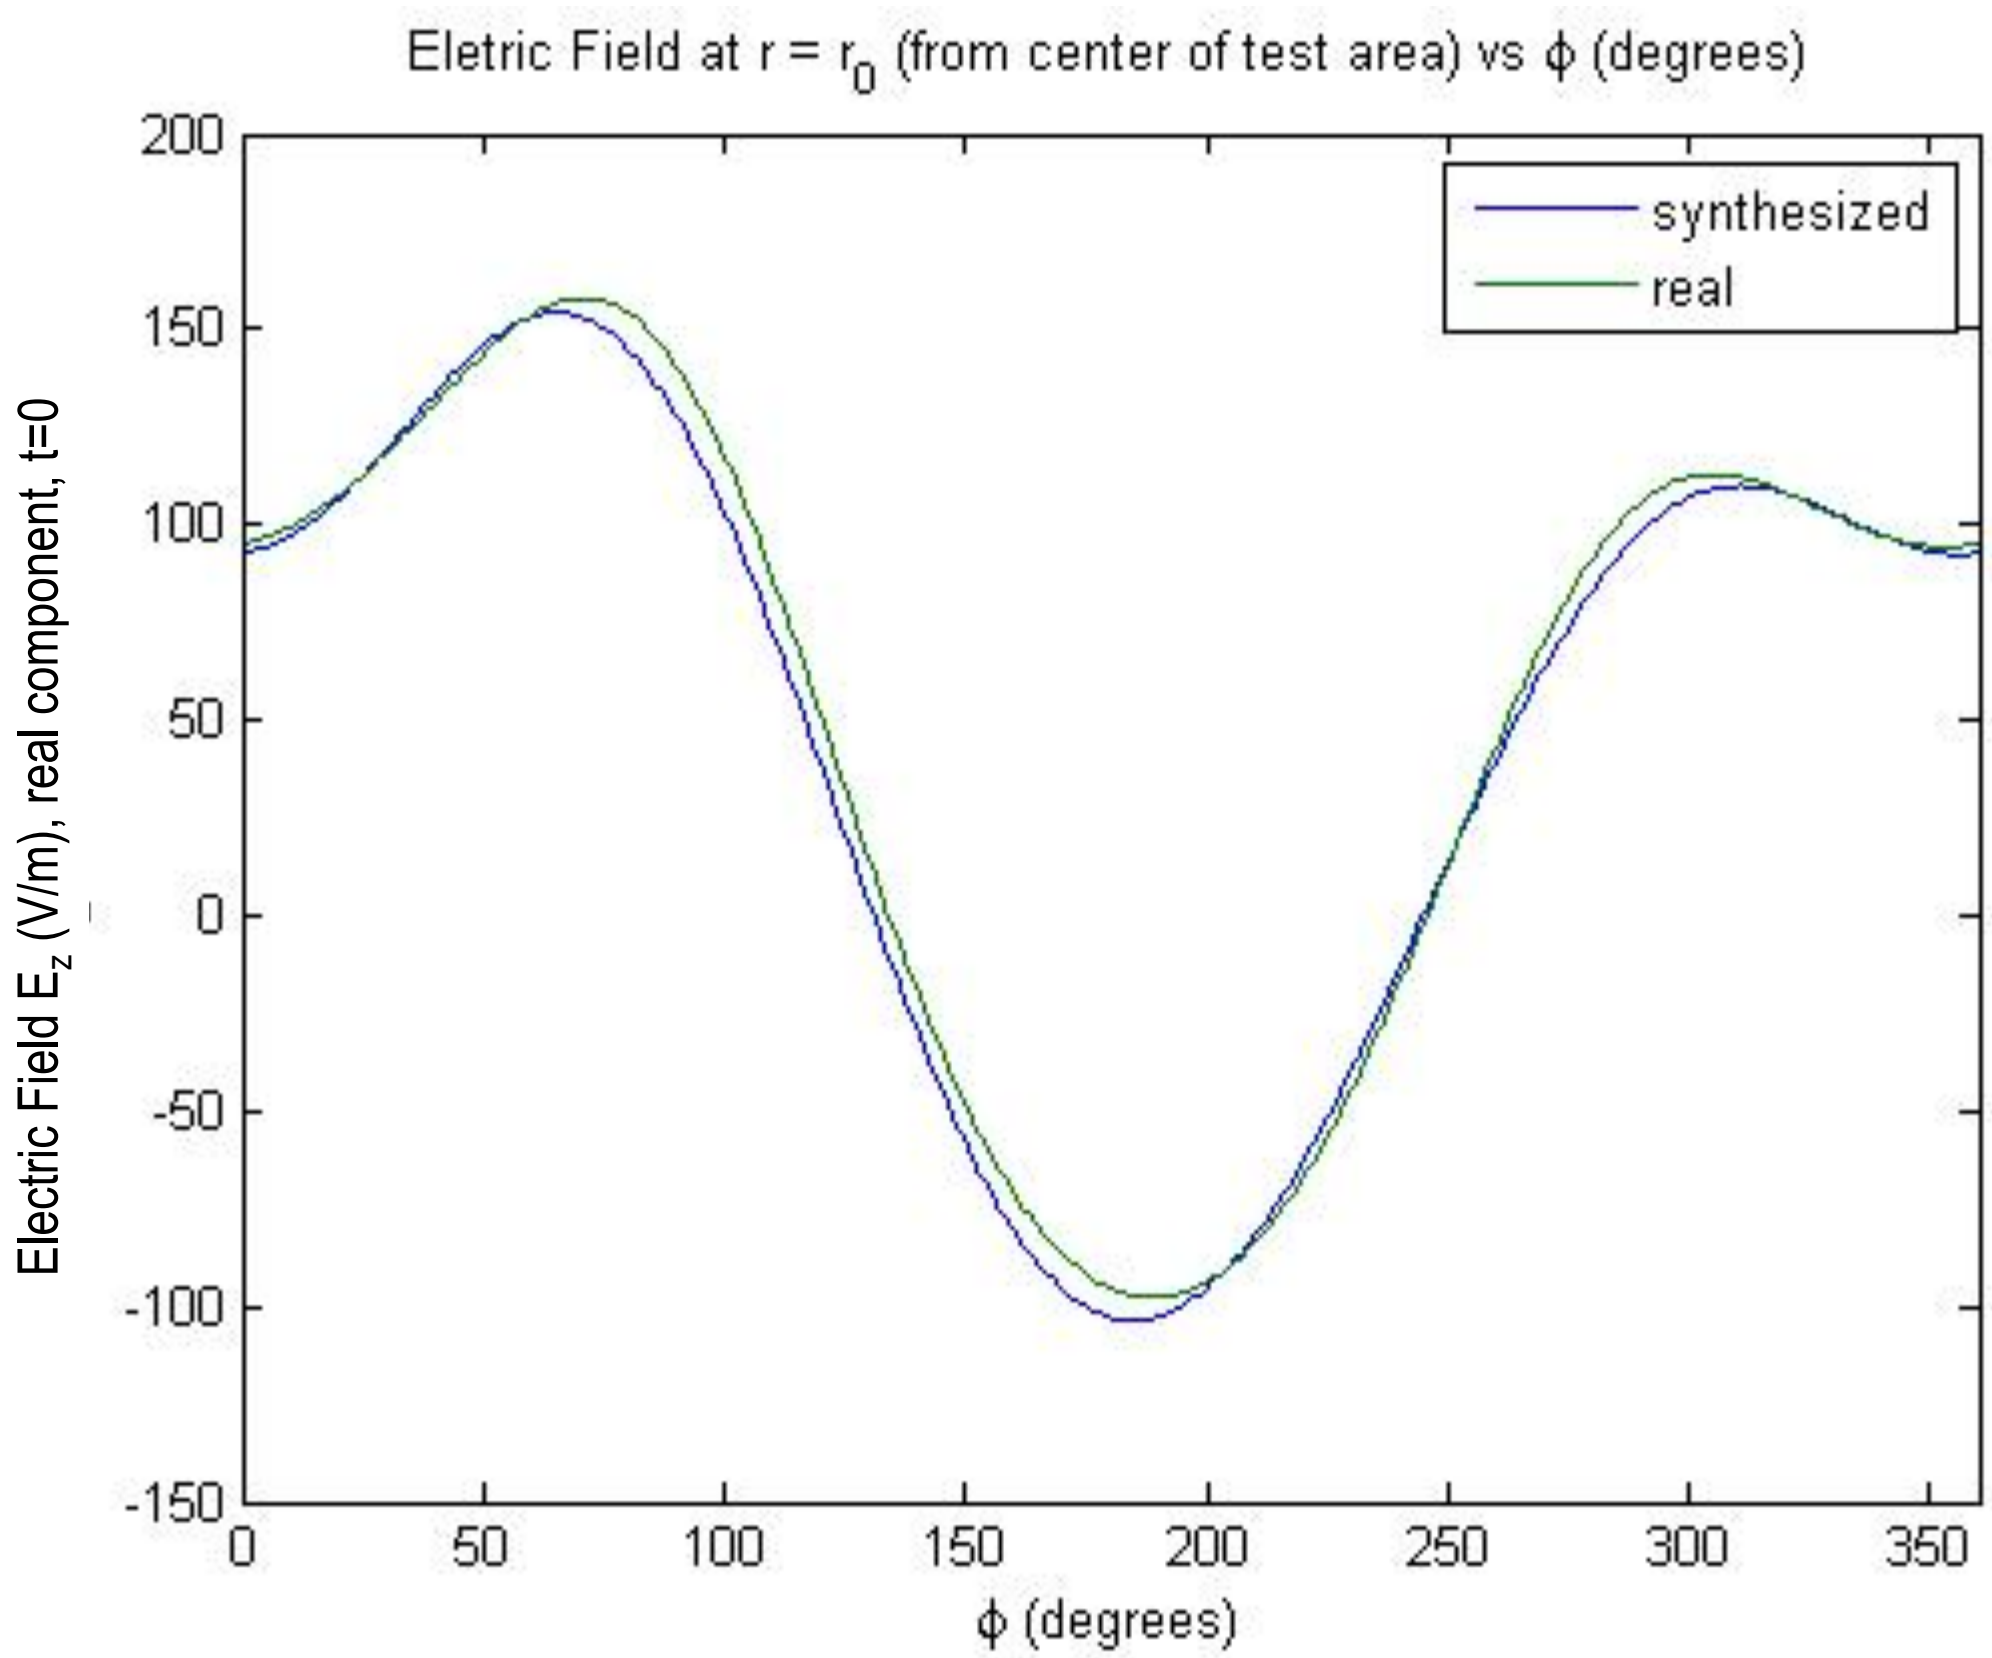

Synthesized electric field levels around the circumference of the test zone agrees with the theoretical field levels for the desired Laplacian PAS

Note: Results are shown for a single instance in time

E-field Error vs. Test Zone Radius

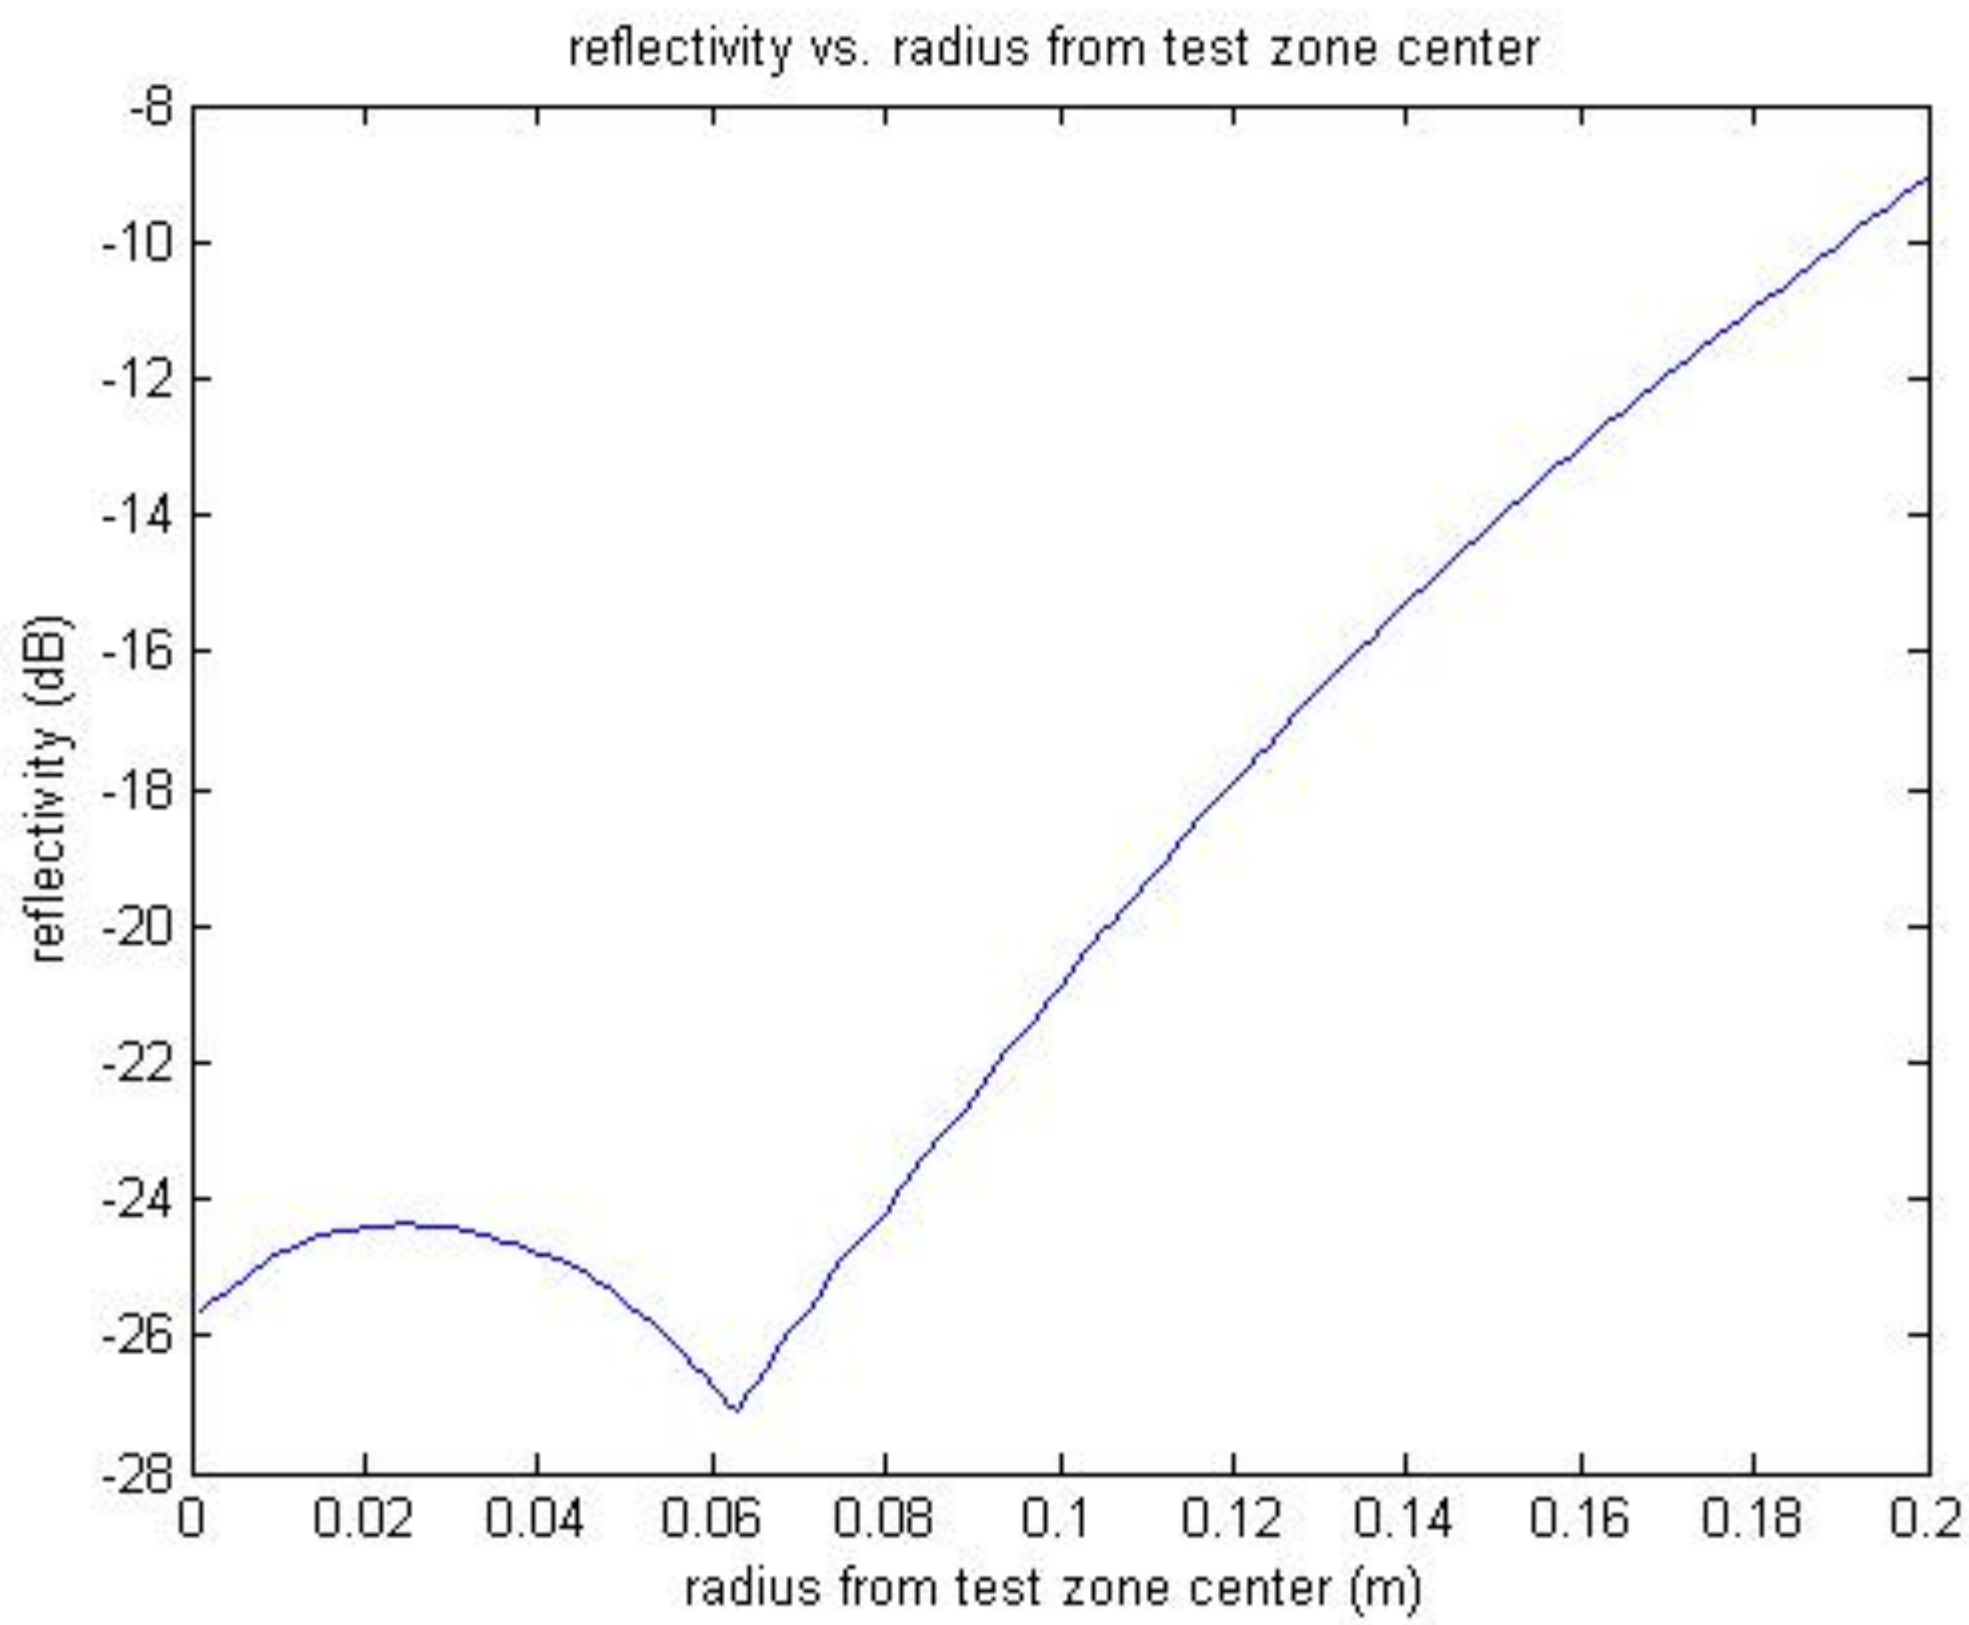

Reflectivity (error) is < 20dB up to 0.1m from the center of the test zone

Reflectivity indicates the maximum E-field error at a given radius relative to the peak field over the entire test zone plane.

Note: Results are shown for a single instance in time

Simulation Technique

- Simulate the generation of a target electromagnetic field in a test zone with different small anechoic chamber dimensions/parameters
- The target EM field is a Laplacian-distributed Power Azimuthal Spectrum with a random phase a each angle $e^{j2\pi\beta}$ where β=[0…1].
- Monte Carlo simulations to determine the reflectivity in the test zone with 95% and 0.25 dB error.

Simulation Configuration Diagram

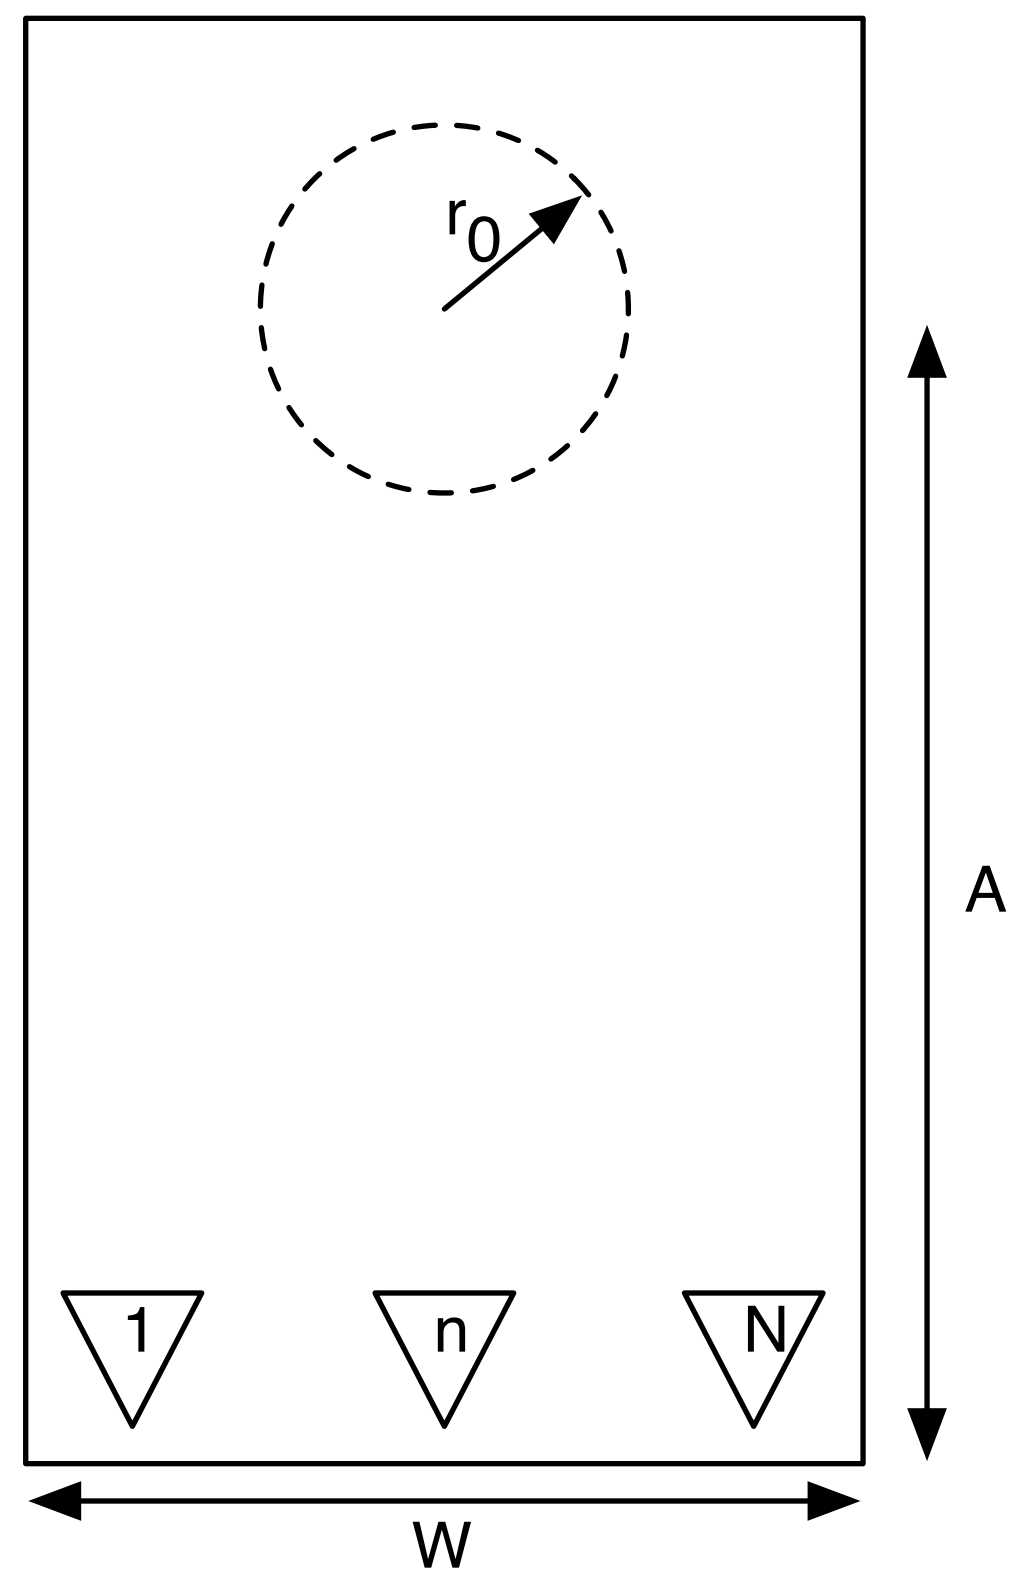

Number of antennas	Chamber height (m)	Chamber width (m)	PAS (σ in degrees)	Frequency (GHz)	Test zone radius (cm)
3,4,5,6	1	0.95, 1.5 2	50,70,90	0.7, 2.4, 5.9	10,15,20

Simulated Reflectivity vs. # Probes, r0, width

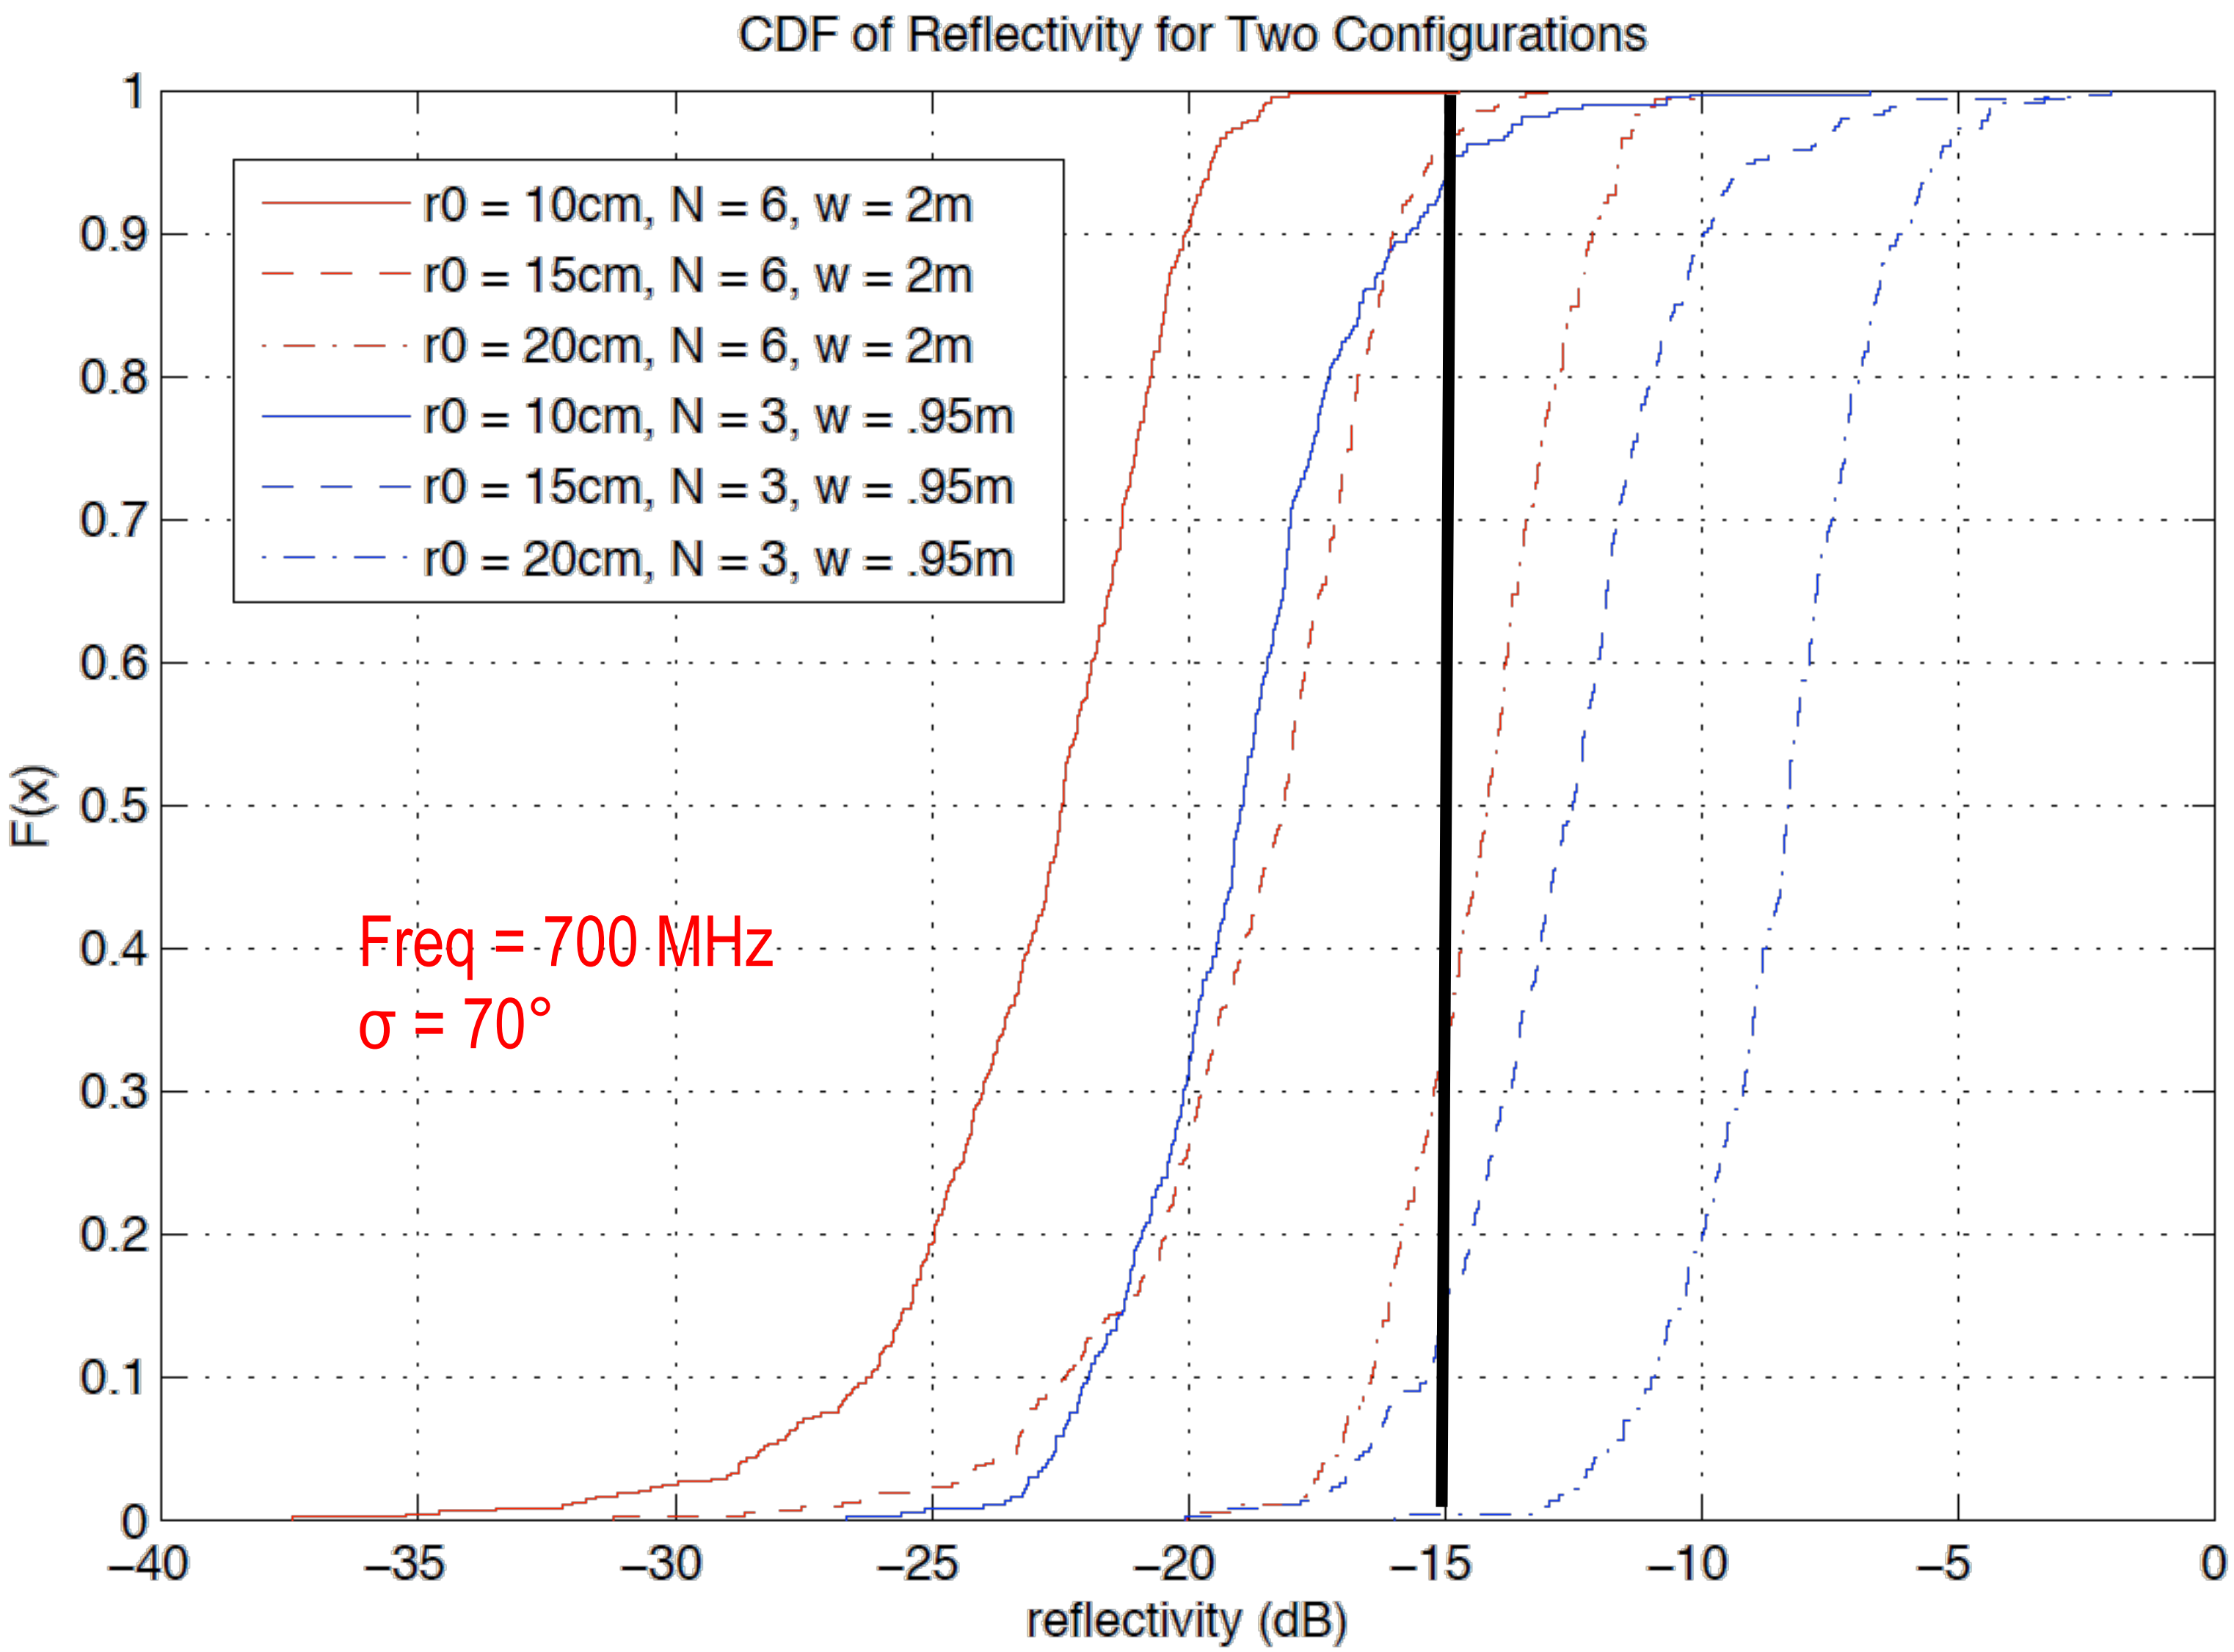

Summary of Simulation Results

- More probes required for bigger test zone radius to maintain the same accuracy (reflectivity)
- For a small laptop or pad sized test zone, 20cm test zone radius, it appears at least 6 probes are required to keep the error (reflectivity) below -15 dB
- Constraining the range of phase variation of the waveform will make this feasible
- Our effort has created a tool to help us optimize error vs. number of probes

Computation EM Simulations

- Field based simulations do not account for reflections and near-field effects
- Create a chamber model to analyze the performance of a realistic system
- Vacuum results are comparable
- Reflections and NF must be accounted for

r_0 (m)	N	Lap. σ (deg)	Freq	Width (m)	Matlab, vacuum		HFSS, vacuum		HFSS, chamber	
					mean ref. (dB)	std. dev. ref. (dB)	mean ref. (dB)	std. dev. ref. (dB)	mean ref. (dB)	std. dev. ref. (dB)
0.1	6	25	700 MHz	2.0	-36.7199	2.4177	-36.2777	2.2741	-21.5130	4.4618
0.1	6	35	700 MHz	2.0	-34.6884	3.5247	-34.2675	3.4109	-22.1664	4.4680
0.1	6	45	700 MHz	2.0	-30.7851	4.5645	-30.3239	4.5859	-22.4231	4.7571
0.1	3	25	2 GHz	0.95	-17.1502	3.6965	-17.3265	3.9848	-15.1249	2.9846
0.1	3	35	2 GHz	0.95	-14.3711	3.6514	-13.4716	3.5810	-12.9946	3.1708
0.1	3	45	2 GHz	0.95	-12.2670	3.5722	-11.3945	3.4241	-11.0843	3.1304

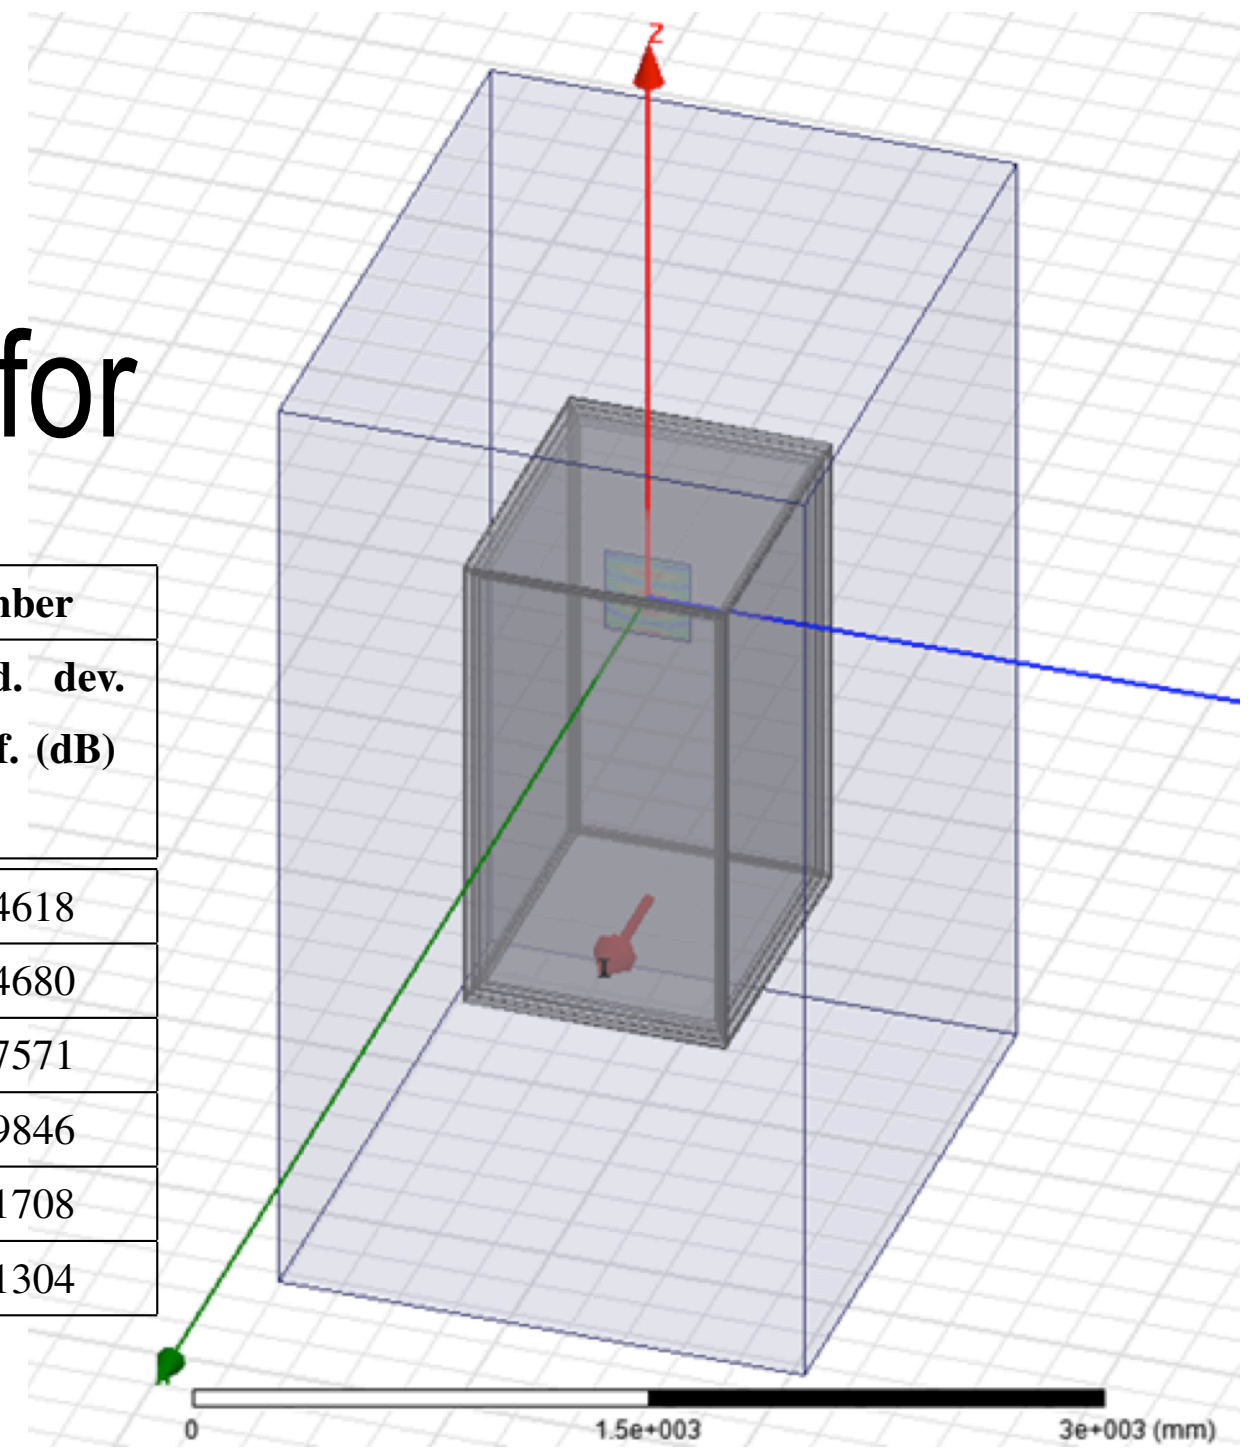

Verifying Laplacian Field

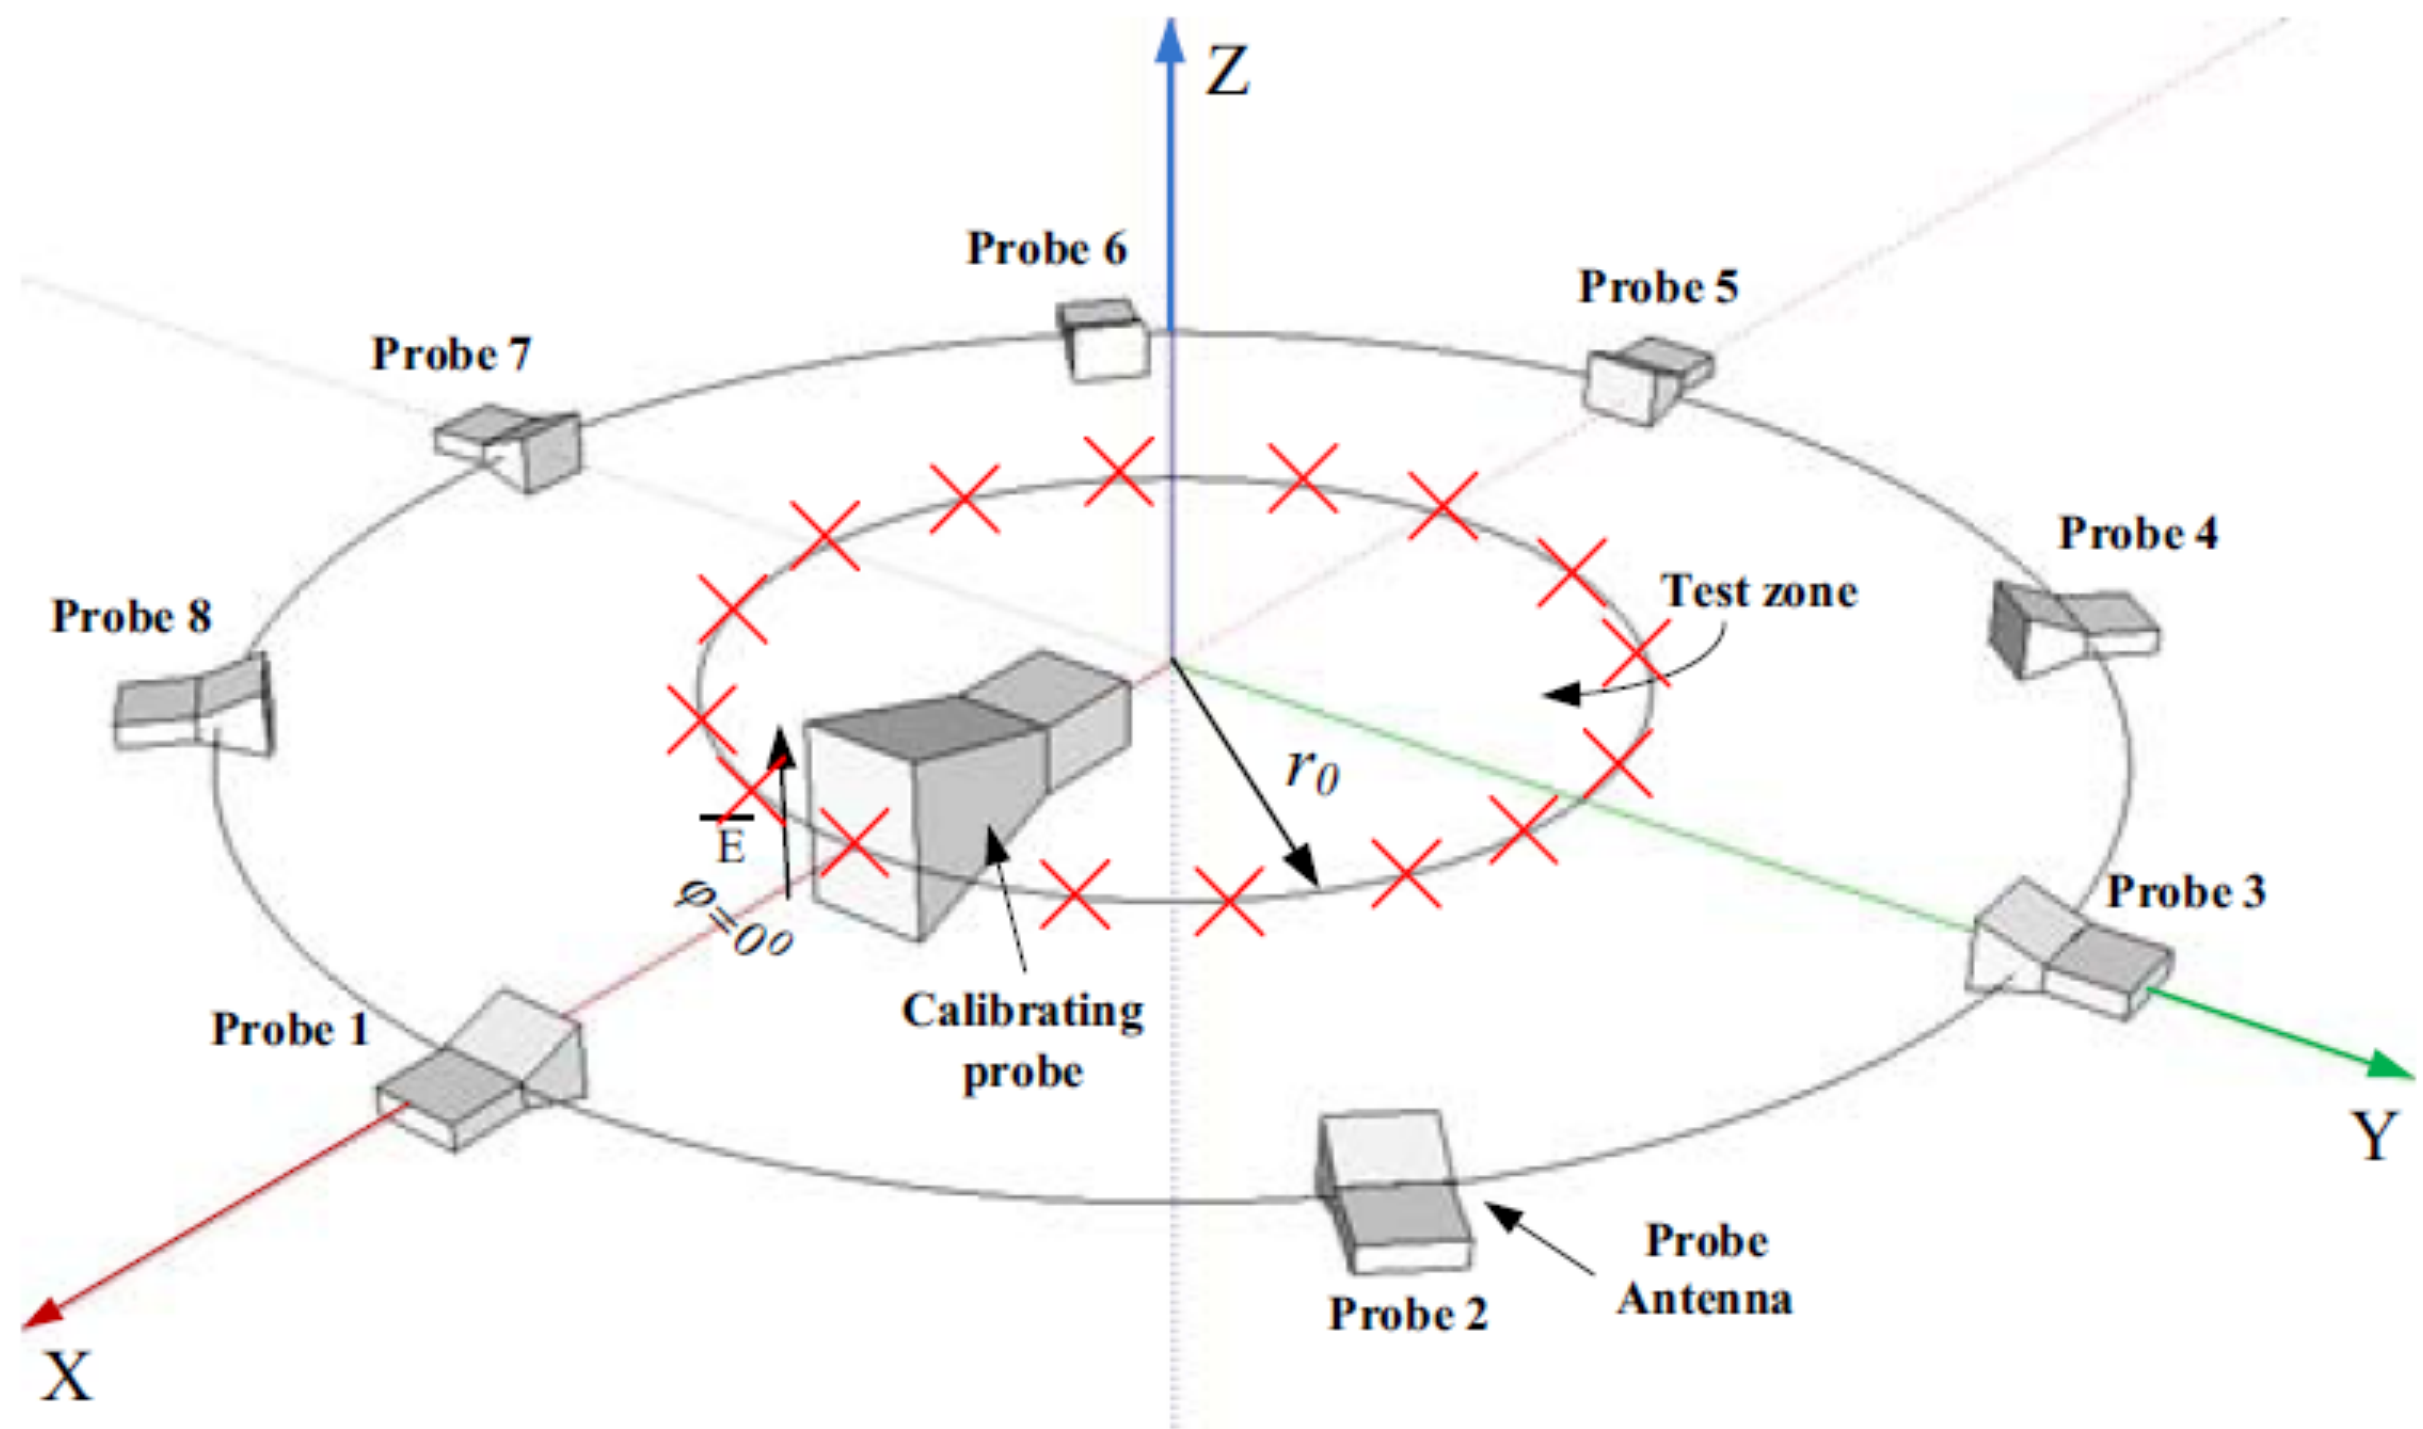

Fig. 3. The 2-D multi-probe system calibration setup of eight probes. The red crosses are the possible locations of the calibrating probe placed equidistantly with constant ϕ intervals ($\Delta\phi$) around the test zone of radius r_0.

Source: "Calibration Procedure for 2-D MIMO Over-The-Air Multi-Probe Test System", by D. Parveg et al

References

1) 3GPP TR 37.977: "Verification of radiated multi-antenna reception performance of User Equipment (UE)"
2) 3GPP TS 34.114: "User Equipment (UE) / Mobile Station (MS) Over The Air (OTA) Antenna Performance Conformance Testing"
3) Charles Capps, "Near field or far field?", EDN, Aug 16, 2001
4) CTIA, "Test Plan for Mobile Station Over the Air Performance - Method of Measurement for Radiated RF Power and Receiver Performance", Revision 3.1, January 2011
5) CTIA, DRAFT "Test Plan for 2x2 Downlink MIMO Over-the-Air Performance"
6) Afroza Khatun et al, "Dependence of Error Level on the Number of Probes in Over-the-Air Multiprobe Test Systems"
7) R4-131673 Measurement uncertainty evaluation of multiprobe method, Nokia Corporation, Anite Telecoms Ltd, Spirent Communications, RAN4#66bis, Chicago
8) J. E. Hansen, "Spherical Near-Field Antenna Measurements", Peter Peregrinus, London, UK, 1988.
9) IEEE, 802.11-03/940r4: TGn Channel Models; May 10, 2004

References

9) Schumacher et al, "Description of a MATLAB® implementation of the Indoor MIMO WLAN channel model proposed by the IEEE 802.11 TGn Channel Model Special Committee", May 2004
10) IEEE 802.11-09/0308r12, "TGac Channel Model Addendum", March 18, 2010
11) IEEE, 11-09-0334-08-00ad-channel-models-for-60-ghz-wlan-systems
12) Schumacher et al, "From antenna spacings to theoretical capacities - guidelines for simulating MIMO systems"
13) Schumacher reference software for implementing and verifying 802.11n models - http://www.info.fundp.ac.be/~lsc/Research/IEEE_80211_HTSG_CMSC/distribution_terms.html
14) 3GPP TR 25.996, "3rd Generation Partnership Project; technical specification group radio access networks; Spatial channel model for MIMO simulations"
15) IST-WINNER II Deliverable 1.1.2 v.1.2, "WINNER II Channel Models", IST-WINNER2, Tech. Rep., 2008 (http://projects.celtic-initiative.org/winner+/deliverables.html)
16) CITA MOSG130705, "Action Item Plan for Defining EUT Size and Test Zone for the Multi-Probe Anechoic Chamber Methodology", by Anatoliy Ioffe et al.
17) "Calibration Procedure for 2-D MIMO Over-The-Air Multi-Probe Test System", by D. Parveg et al